


KV-2752ET / KV-2752EC / KV-2756EC

RM-634 RM-635 RM-635

AEP Model
Chassis No. SCC-522D-A

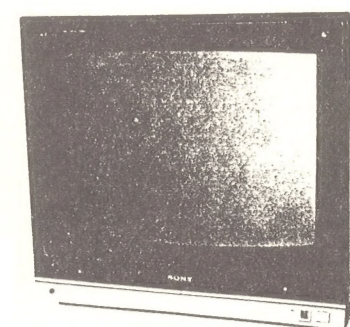


October, 1984

PE-3 CHASSIS

SPECIFICATIONS


CIRCUIT BOARDS LOCATION

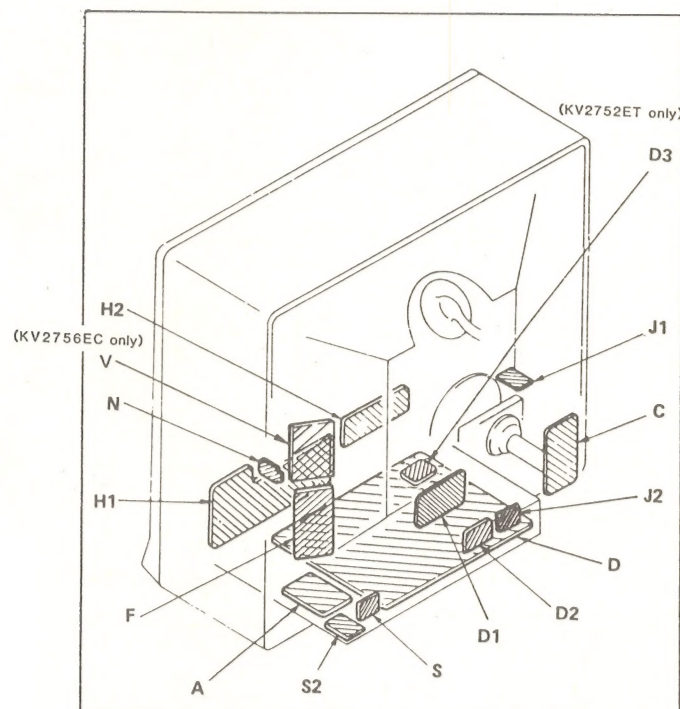



Television system	CCIR system, B, G and H	Outputs	Audio output connector (5-pin DIN)
Color system	PAL		Recording output
Channel coverage	VHF channels E2 – U20 UHF channels E21 – E68		1 mVrms/kilohm
Programming system	30 programmes		Line output
	Automatic programing digital tuning		Variable, 0 – 2 Vrms (max.)
Picture tube	Approx. 68 cm (27 inches)		Impedance less than 1 kilohm
	114-degree deflection Trinitron system		External speaker terminals (2-pin DIN)
	(Approx. 64 cm screen measured diagonally)		For 8 – 16 ohm speakers
Antenna	75-ohm standard serial socket (DIN 45325/IEC 169-Z)	Power requirements	Headphones jack (stereo phone jack)
Speakers	Two speakers		220 – 240 V ac, 50 Hz
	Approx. 10 cm dia.	Power consumption	150 Wh
Audio output	5W+5W (with 10% harmonic distortion)	Dimensions	(Approx. 6Wh in standby condition)
Input	21-pin connector	Weight	Approx. 661 x 622 x 478 mm (w/h/d)
	in accordance with the requirements of CENELEC Standard	Accessory supplied	Approx. 50.5 kg
			Remoto commander RM635


KV2752/56EC/2752ET


BLOCK DIAGRAM

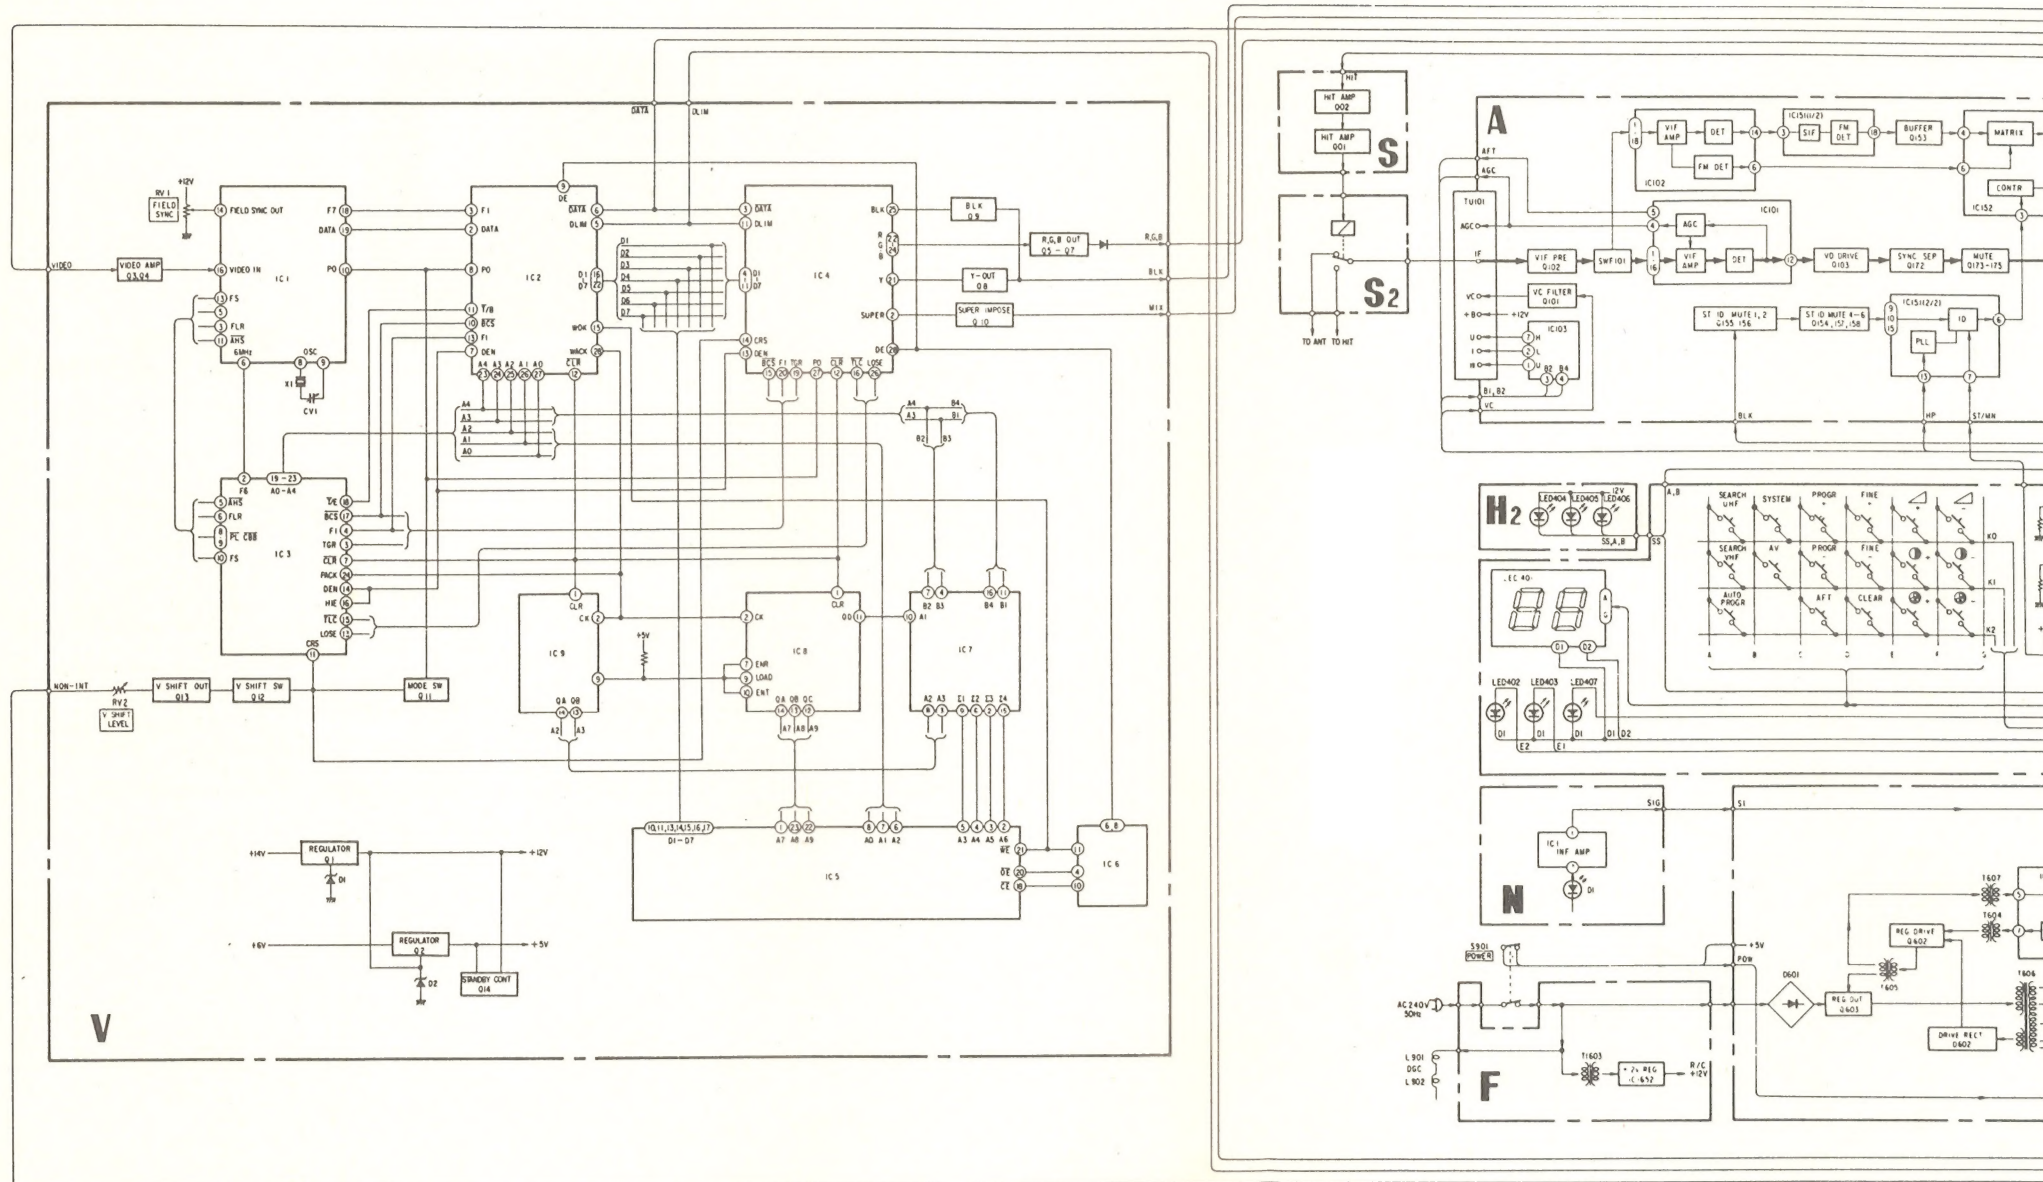







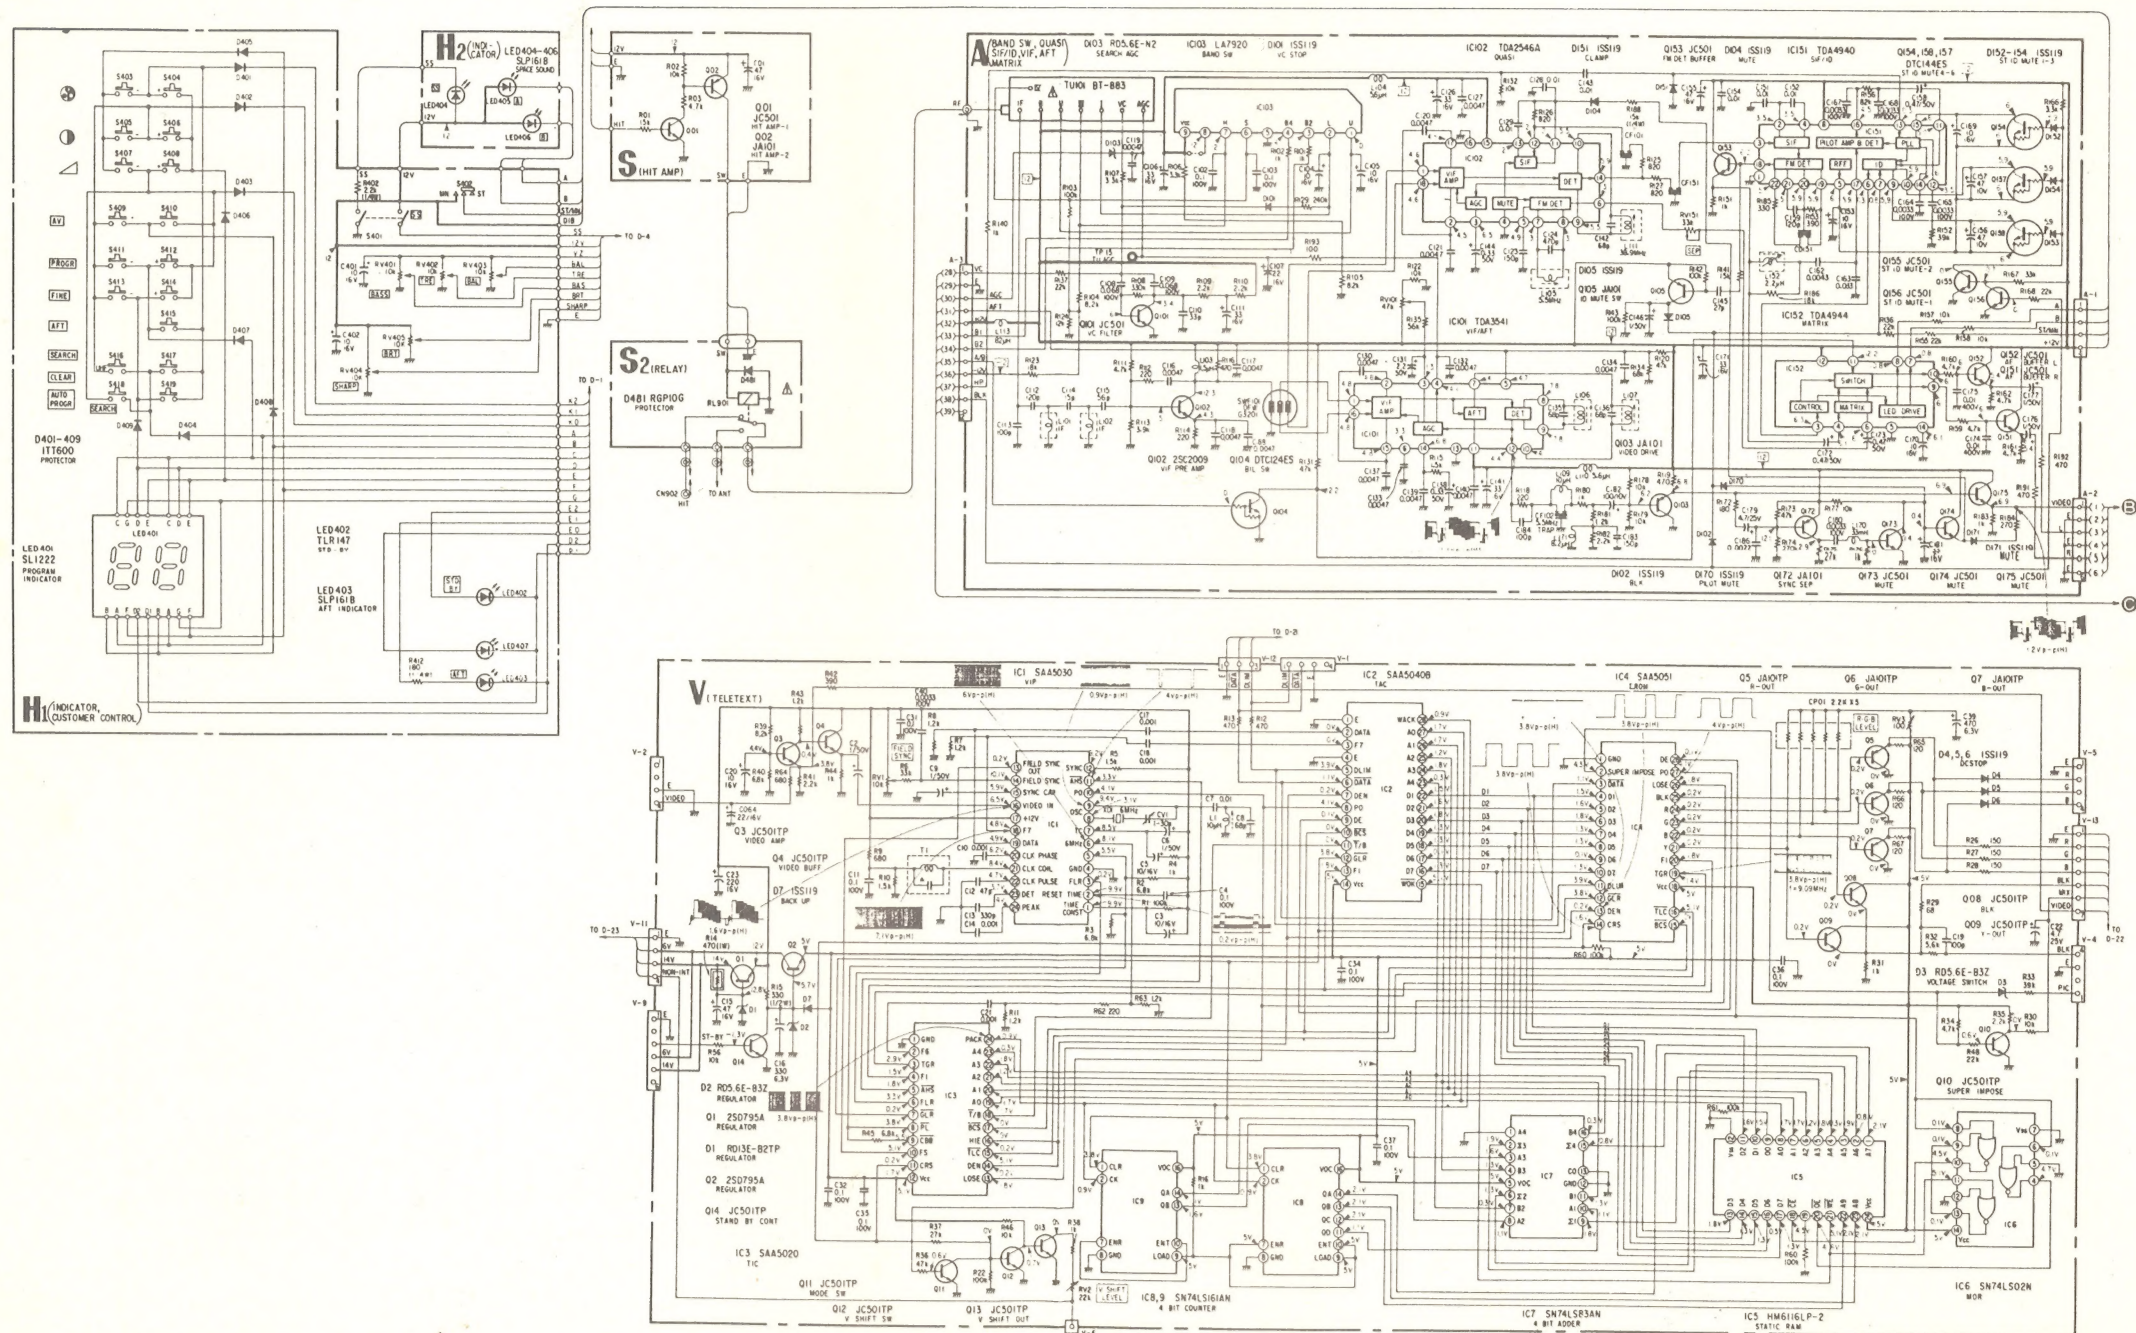

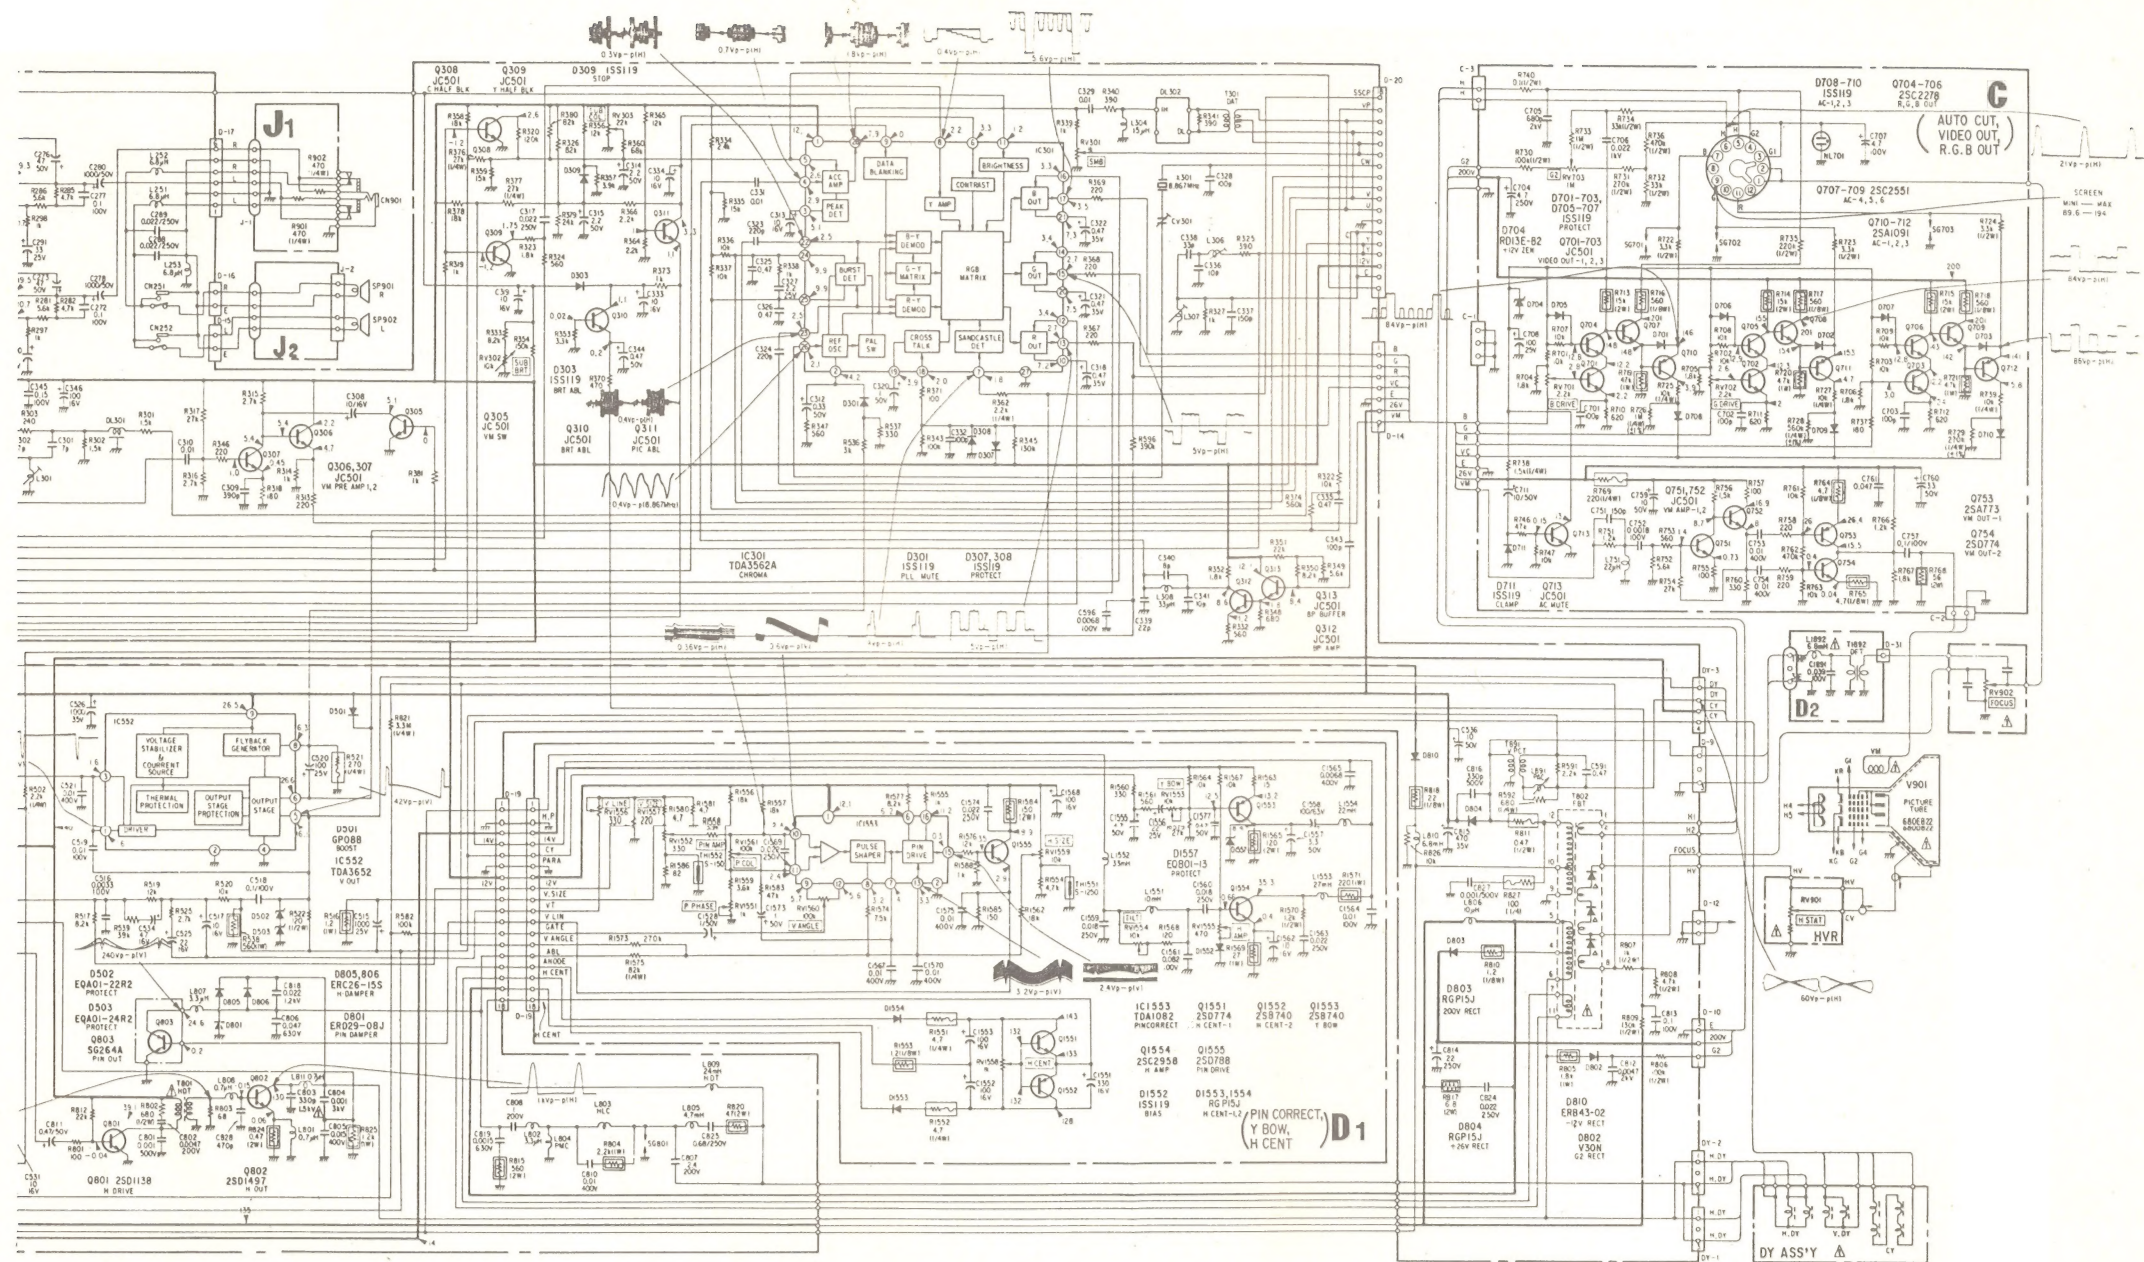

only)

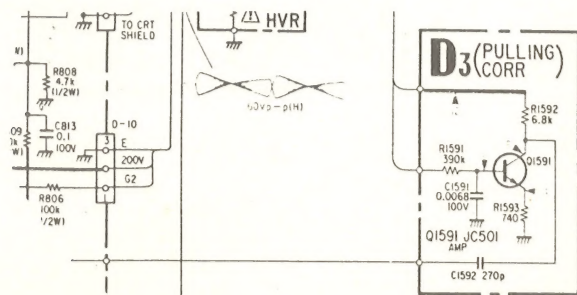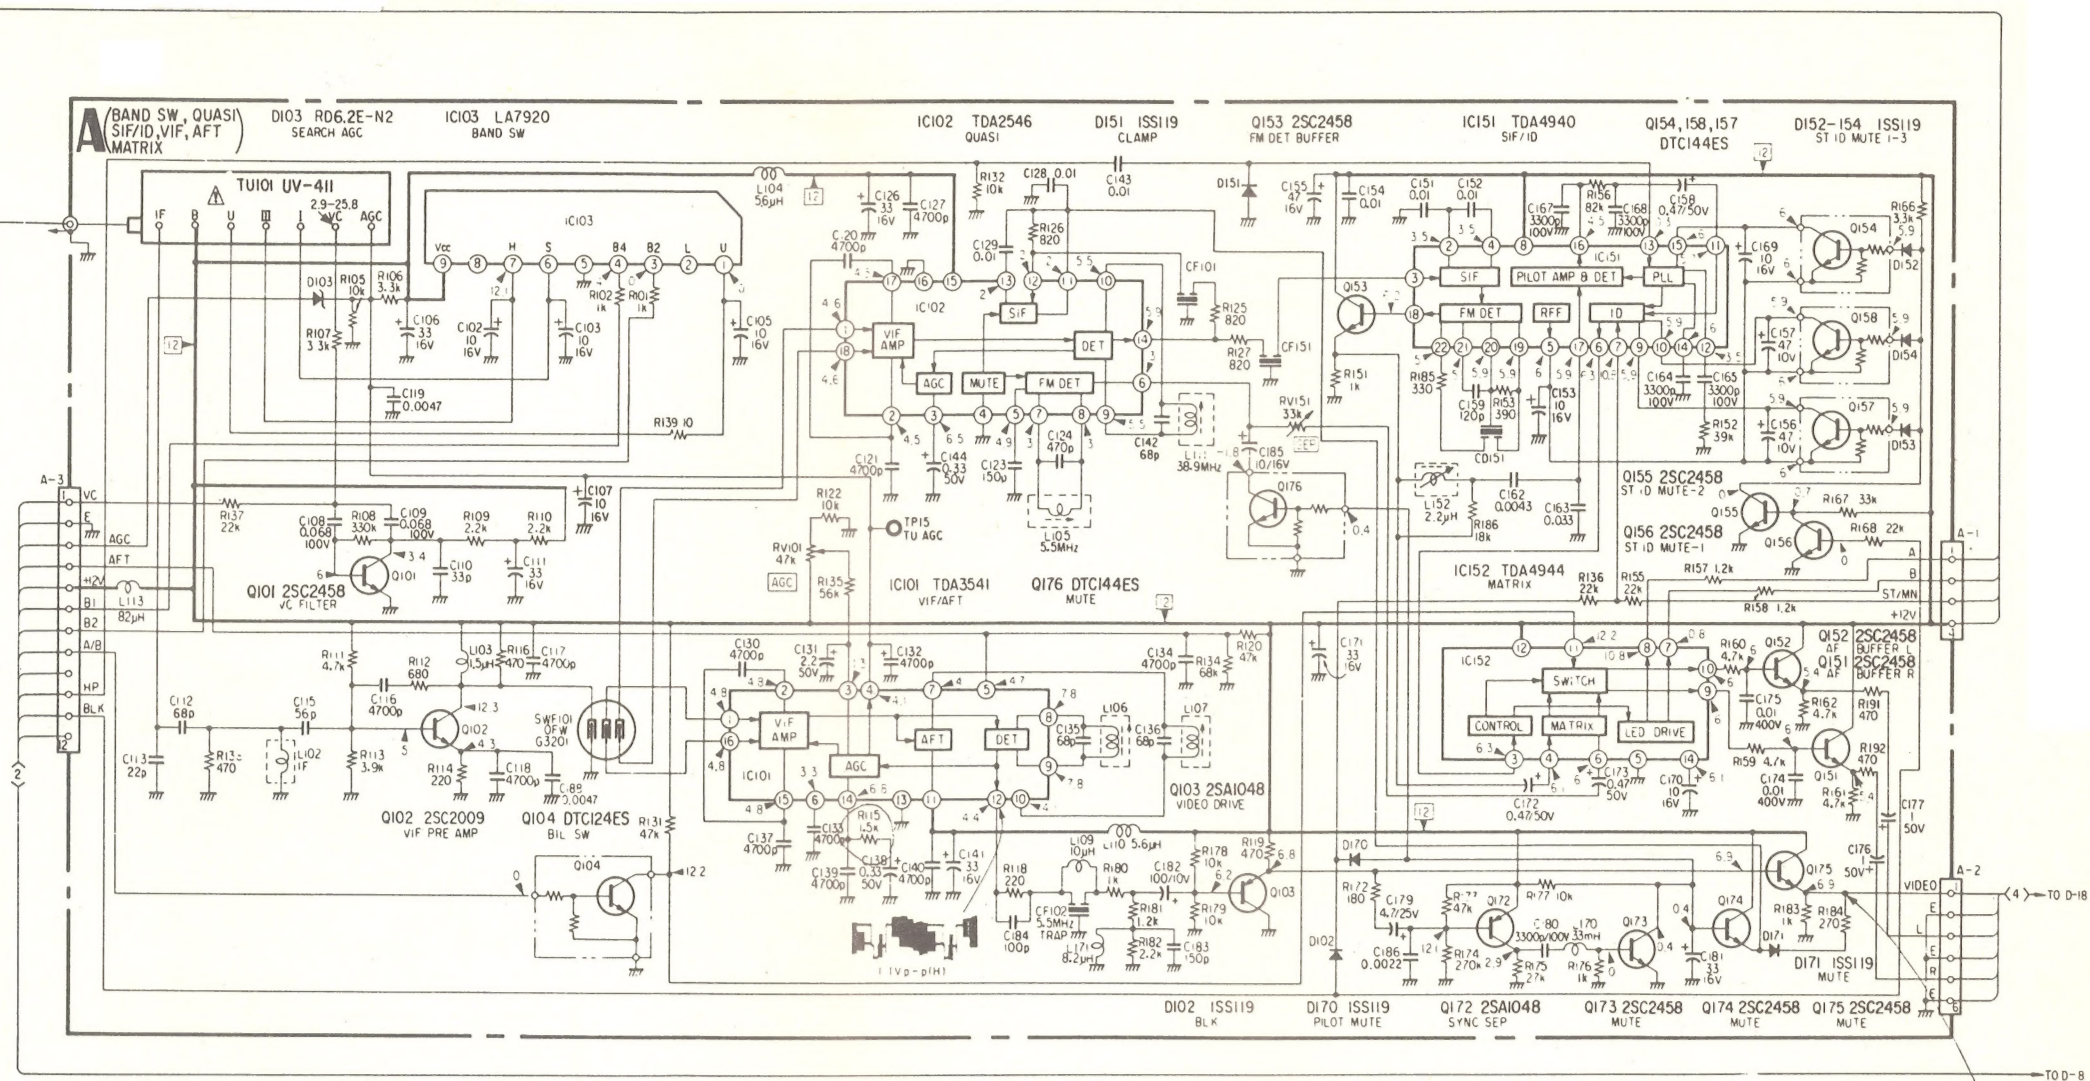


(KV2752ET only)




Q IC	104	101	IC103	102	IC102	153	IC151	156,155,154	Q IC
D	103	101	151		IC101	176 173	IC152 172	157,158 175,151,152	D
ADJ							RV151		ADJ
TP		15							TP


(KV2752ET only)

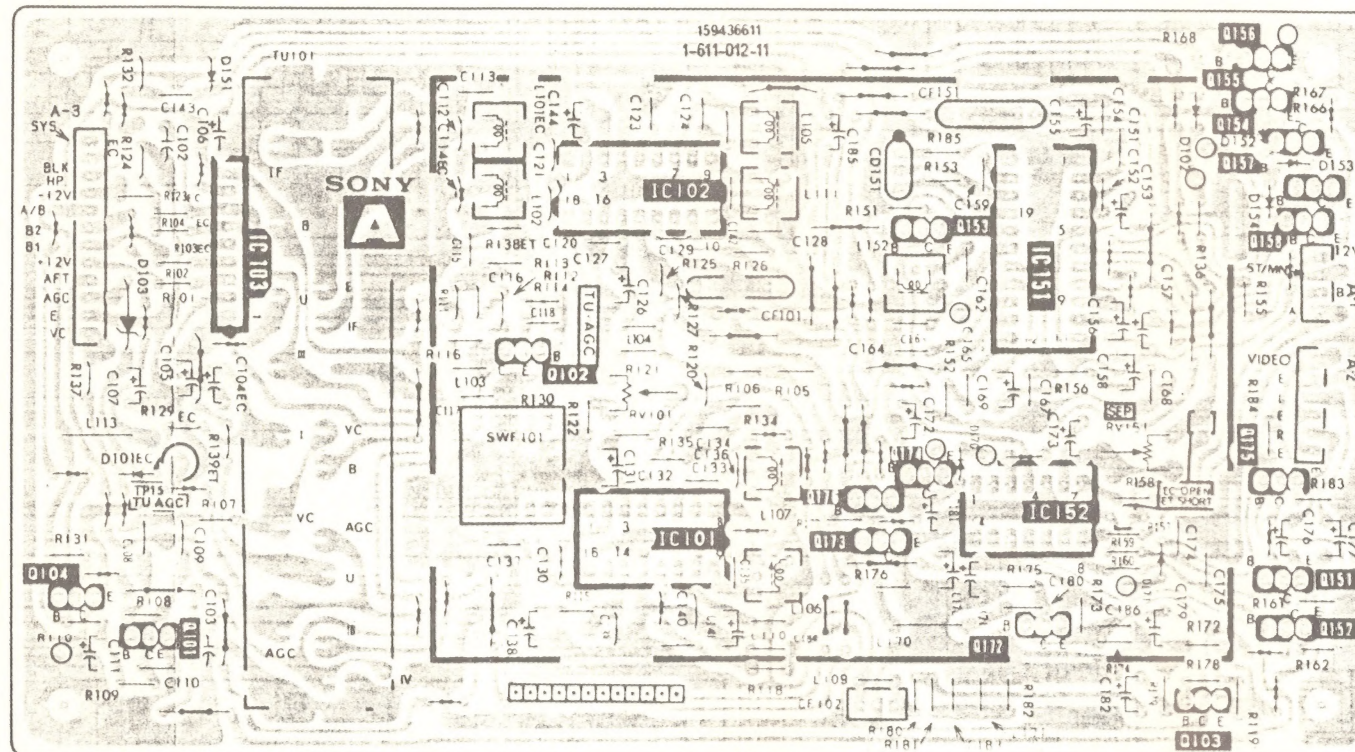


(KV2752ET only)

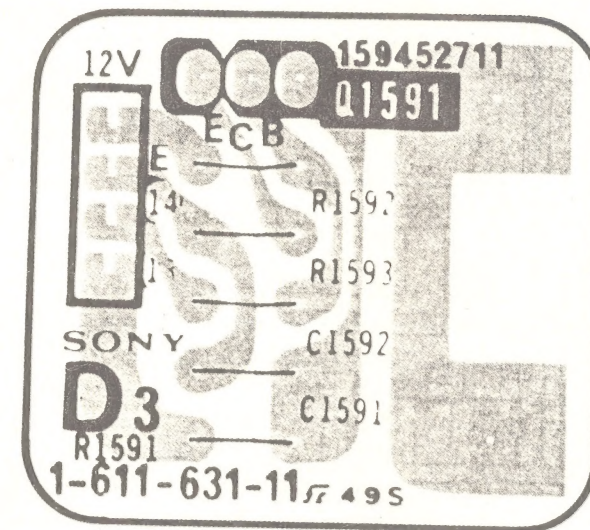


— D1 board —

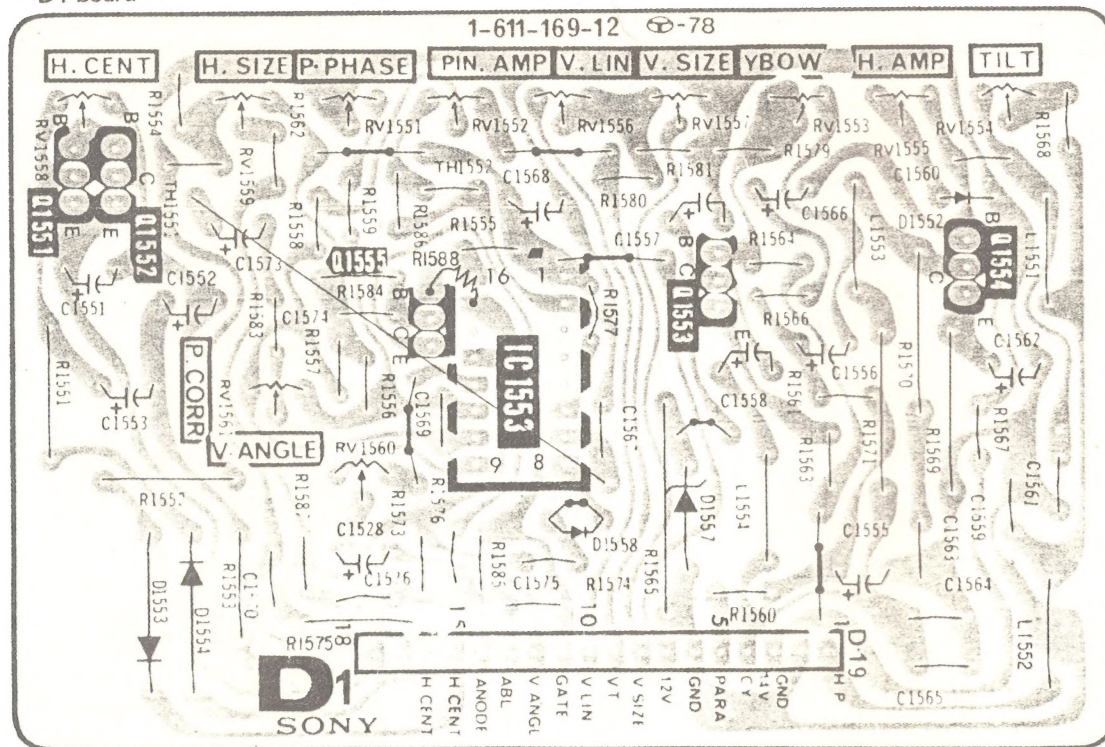


— C board —

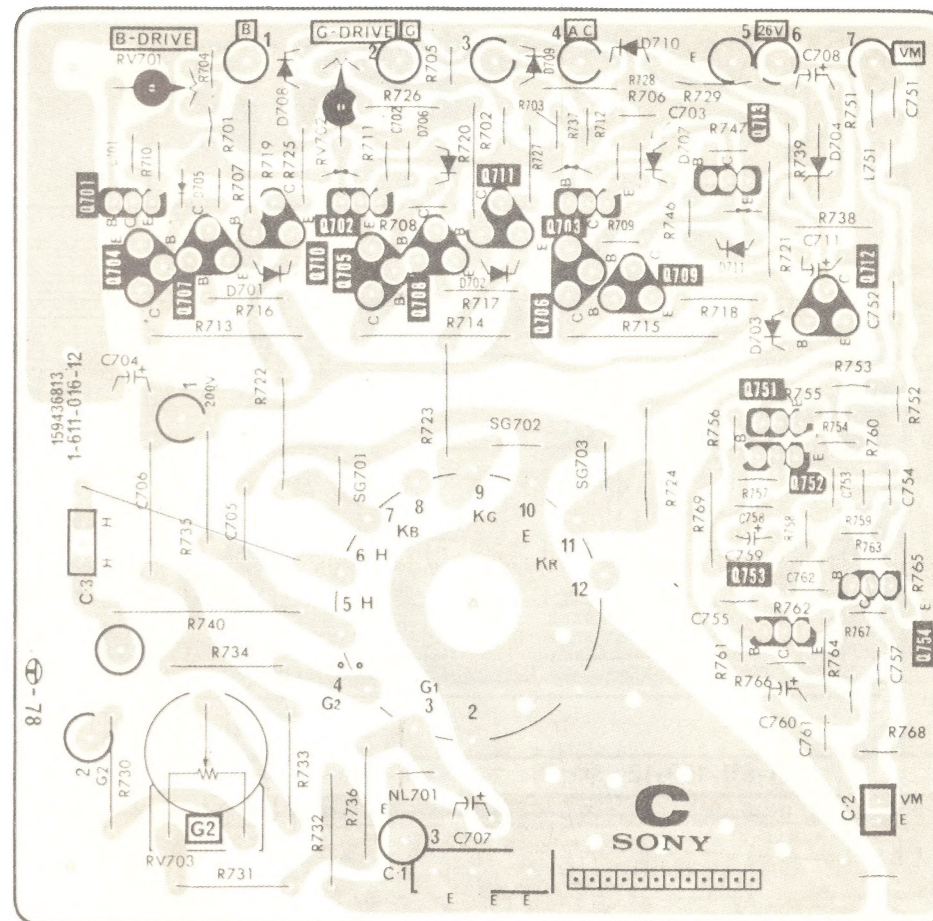


— H2 board —

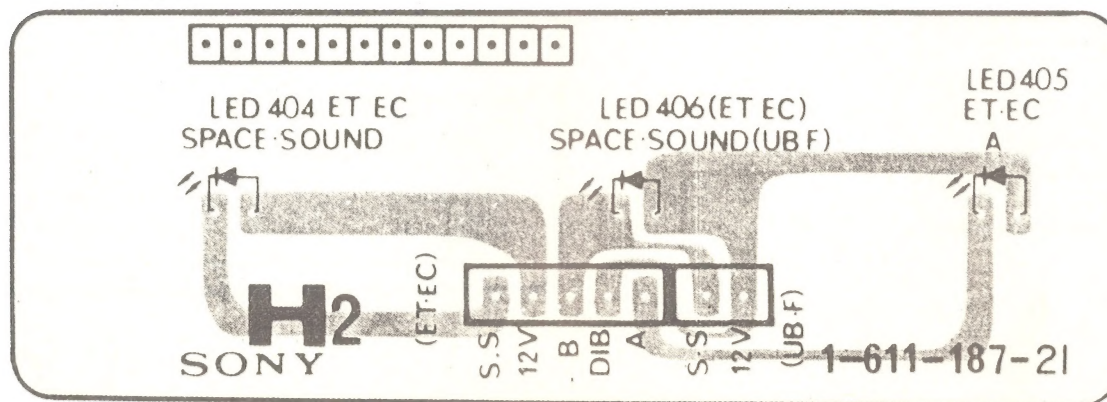


— F board —

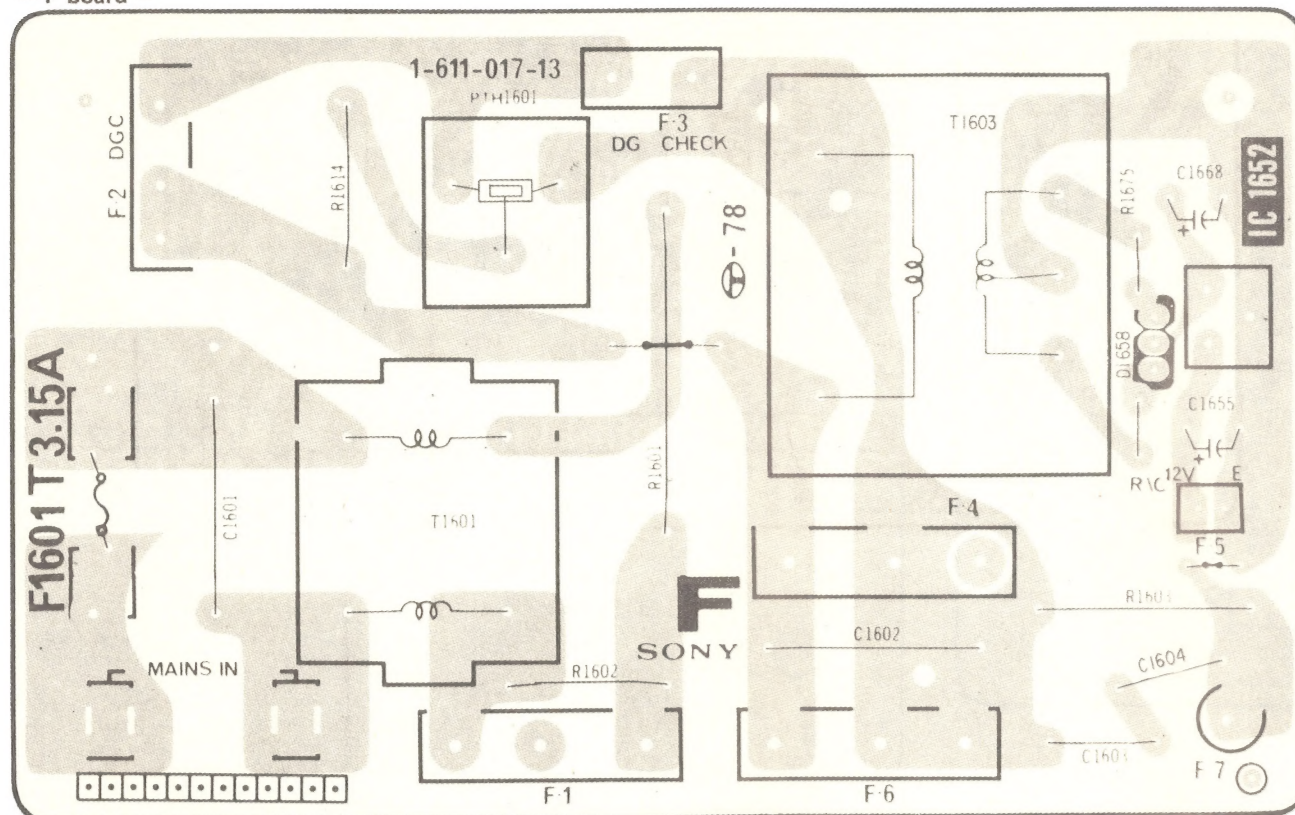


— S2 board —

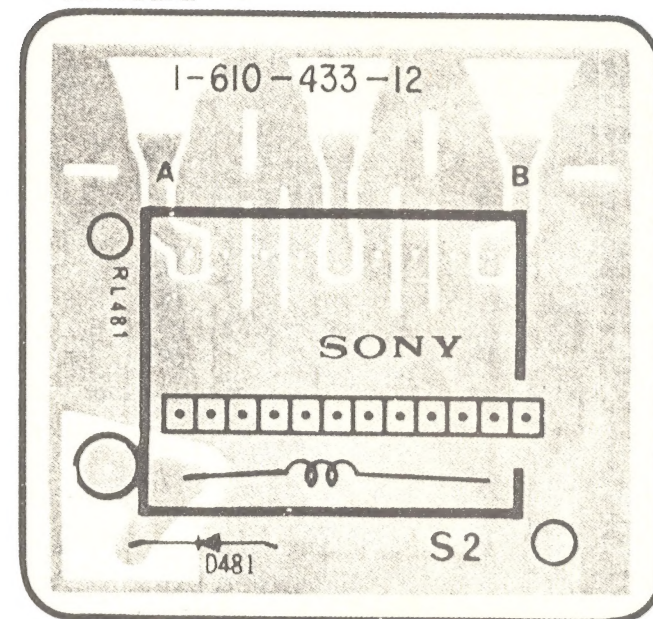

— N board —

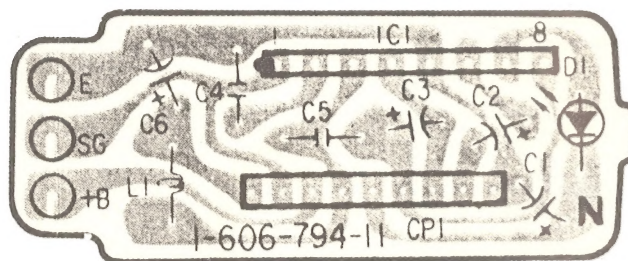

— J2 board —

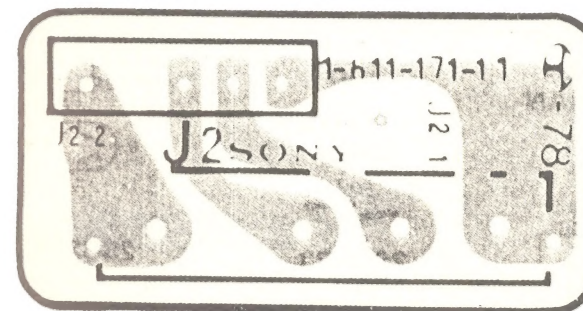

EXPLODED VIEWS


NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.

- As to the part numbered with E-, refer to the electrical parts list.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

1. BEZEL

●: TA, BV3 x 12 7-685-648-71
△: TA, BV4 x 16 7-685-663-71

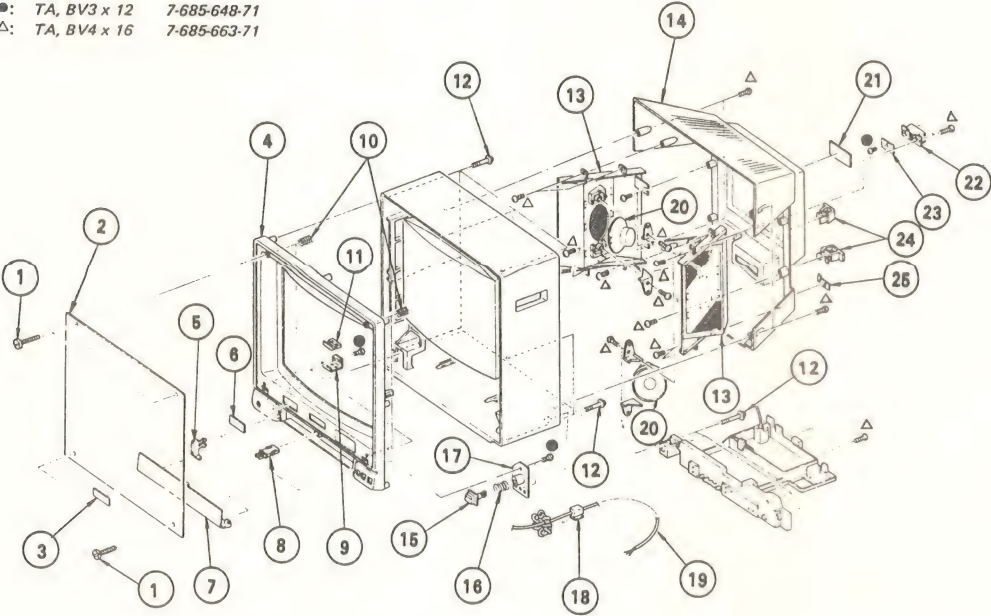


No.	Part No.	Description
1	4-336-851-11	SCREW, ORNAMENTAL
2	4-369-109-02	FILTER, GLASS
3	X-3701-084-0	EMBLEM (LARGE) ASSY, SONY
4	X-4369-108-3	BEZEL ASSY
5	4-362-203-00	SHAFT, DOOR
6	*4-362-289-00	PLATE, ORNAMENTAL, INDICATOR
7	4-362-225-11	DOOR, CONTROL
8	4-352-034-00	CATCHER, PUSH
9	*4-362-201-00	HOLDER, FILTER
10	4-357-414-00	NUT (MAX20)
11	4-336-808-00	PROTECTOR, FILTER
12	4-319-520-00	SCREW, SPECIAL (+PW4X30)
13	X-4362-203-2	PLATE ASSY, BAFFLE, SPEAKER

No.	Part No.	Description
14	4-369-113-00	COVER, BACK
15	X-4362-201-0	BUTTON ASSY, POWER
16	4-362-278-00	SPRING, COMPRESSON
17	*4-362-206-00	HOLDER, POWER BUTTON
18	△4-022-115-01	HOLDER, AC CORD
19	△1-551-270-31	CORD, POWER
20	1-503-270-00	SPEAKER
21	*4-369-154-01	LABEL, MODEL NUMBER
22	4-368-615-00	COVER, CONNECTOR
23	*1-611-171-00	J2 BOARD
24	4-369-108-00	HOLDER, CORD
25	4-329-127-00	CLAMP, CORD


2. CABINET

▲: TA, BV4 x 12 7-685-661-14

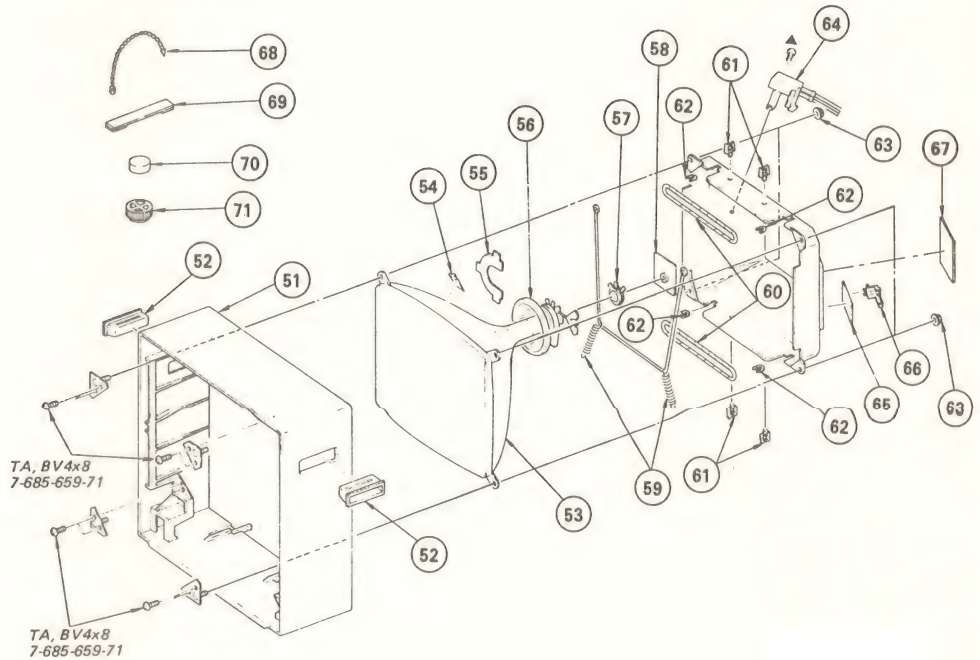

No.	Part No.	Description
51	X-4369-105-3	CABINET ASSY
52	4-318-207-21	HANDLE
53	△8-738-405-05	CRT (6800B22)
54	3-703-003-00	SPACER, DY
55	1-452-146-21	MAGNET, BMC
56	△1-451-226-11	DEFLECTION YOKE (SY105A)
57	△1-452-315-11	CRT NECK ASSY (NA303)
58	*A-1330-475-A	C BOARD, COMPLETE
59	4-303-774-XX	SPRING
60	△1-426-041-21	COIL, DEGAUSSING
61	*4-322-922-00	HOLDER, COIL, DEGAUSSER

No.	Part No.	Description
62	*4-330-306-00	BUSHING, CRT INSULATING
63	4-330-305-00	NUT, SPECIAL
64	△1-228-544-11	RESISTOR ASSY, HIGH-VOLTAGE
65	*1-611-017-00	F BOARD
66	*4-362-247-00	COVER, AC TERMINAL
67	*A-1325-009-A	V BOARD, COMPLETE
68	4-308-870-00	CLIP, LEAD WIRE
69	X-4308-815-0	PERMALLOY ASSY, CONVERGENCE
70	1-452-032-00	MAGNET, DISK; 10MM ϕ
71	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM ϕ

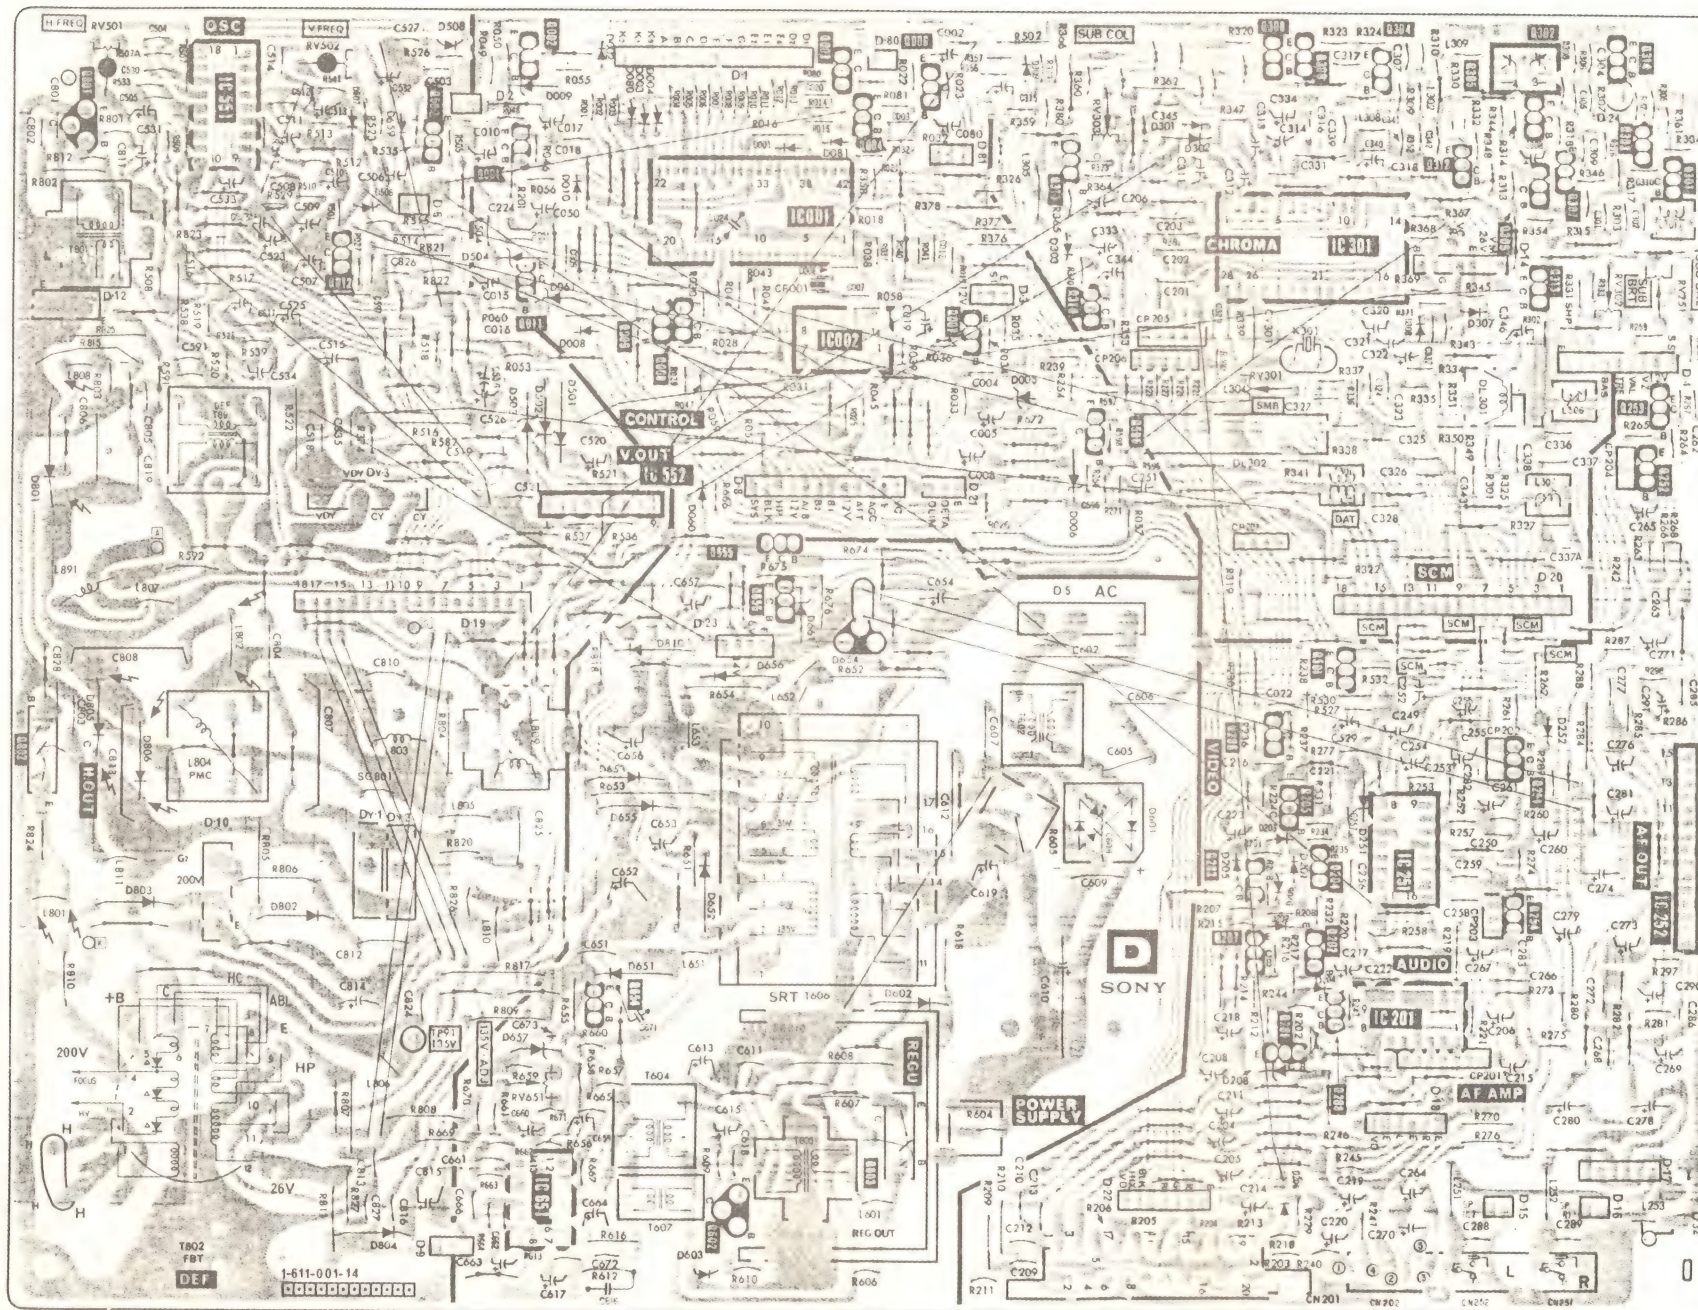

	Q	IC	D	ADJ
	002	308		
	003	309		
		314		
	006	302		
	004	305		
IC551			002	502
			009	501
			001	080
	507	004		
907	502	303	509	301
001	311		302	
			081	
	312			
	307			
	301		010	
IC301	306		506	
			504	
	IC301			
012			303	
011	313		504	
			061	
009	310		307	251
008			308	302
IC002			008	
007				
				301
	253		005	
	596		503	
			502	
	252		501	
IC552			801	
			006	
			060	
655				
			661	
			654	
501			802	
			656	
	206	805	252	
802	251	806	653	
	205			
		655	251	
IC251		601		
203			203	
204				
IC252		652	205	
			201	
			206	
254		803	802	202
	202			
207			602	
			651	
			204	
IC201				
654				
208				
201		657		
			208	
				651
603				
IC651				
602		804		
		603		
Q	IC	D	ADJ	

A

A

V

Ref.No.	Part No.	Description	Remark
C153	1-123-356-00	ELECT 10MF 20% 16V	
C154	1-101-004-00	CERAMIC 0.01MF 50V	
C155	1-123-332-00	ELECT 47MF 20% 16V	
C156	1-123-306-00	ELECT 47MF 20% 10V	
C157	1-123-306-00	ELECT 47MF 20% 10V	
C158	1-123-379-00	ELECT 0.47MF 20% 50V	
C159	1-102-816-00	CERAMIC 120PF 5% 50V	
C162	1-108-570-00	MYLAR 0.0043MF 5% 50V	
C163	1-136-159-00	FILM 0.033MF 5% 50V	
C164	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C165	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C167	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C168	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C169	1-123-356-00	ELECT 10MF 20% 16V	
C170	1-123-356-00	ELECT 10MF 20% 16V	
C171	1-123-318-00	ELECT 33MF 20% 16V	
C172	1-123-379-00	ELECT 0.47MF 20% 50V	
C173	1-123-379-00	ELECT 0.47MF 20% 50V	
C174	1-110-190-81	MYLAR 0.01MF 10% 400V	
C175	1-110-190-81	MYLAR 0.01MF 10% 400V	
C176	1-123-380-00	ELECT 1MF 20% 50V	
C177	1-123-380-00	ELECT 1MF 20% 50V	
C179	1-123-369-00	ELECT 4.7MF 20% 25V	
C180	1-106-184-00	MYLAR 0.0033MF 10% 100V	
C181	1-123-318-00	ELECT 33MF 20% 16V	
C182	1-123-307-00	ELECT 100MF 20% 10V	
C183	1-102-108-00	CERAMIC 150PF 10% 50V	
C184	1-102-973-00	CERAMIC 100PF 5% 50V	
C186	1-102-121-00	CERAMIC 0.0022MF 10% 50V	
C188	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C189	1-110-190-81	MYLAR 0.01MF 10% 400V	
DISCRIMINATOR			
CD151	1-404-501-00	DISCRIMINATOR, CERAMIC	
FILTER			
CF101	1-527-840-00	FILTER, CERAMIC	
CF102	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF151	1-527-839-00	FILTER, CERAMIC	
DIODE			
D101	8-719-911-19	DIODE 1SS119	
D102	8-719-911-19	DIODE 1SS119	
D103	8-719-102-71	DIODE R05.6E-N2	
D104	8-719-911-19	DIODE 1SS119	
D105	8-719-911-19	DIODE 1SS119	
D151	8-719-911-19	DIODE 1SS119	
D152	8-719-911-19	DIODE 1SS119	
D153	8-719-911-19	DIODE 1SS119	
D154	8-719-911-19	DIODE 1SS119	
D170	8-719-911-19	DIODE 1SS119	
D171	8-719-911-19	DIODE 1SS119	

Ref.No.	Part No.	Description	Remark
IC			
IC101	8-759-909-08	IC TDA3541	
IC102	8-759-909-54	IC TDA2546A	
IC103	8-759-800-12	IC LA7920	
IC151	8-759-007-54	IC TDA4940	
IC152	8-759-007-55	IC TDA4944	
COIL			
L101	1-404-476-00	COIL, IF	
L102	1-404-476-00	COIL, IF	
L103	1-408-399-00	MICRO INDUCTOR 1.5UH	
L104	1-408-406-00	MICRO INDUCTOR 5.6UH	
L105	1-404-477-00	COIL, IF	
L106	1-404-493-00	COIL	
L107	1-404-493-00	COIL	
L109	1-408-409-00	MICRO INDUCTOR 10UH	
L110	1-408-406-00	MICRO INDUCTOR 5.6UH	
L111	1-404-493-00	COIL	
L113	1-408-226-00	MICRO INDUCTOR 82UH	
L152	1-404-506-00	COIL, VARIABLE	
L170	1-408-247-00	MICRO INDUCTOR 33MH	
L171	1-408-408-00	MICRO INDUCTOR 8.2UH	
TRANSISTOR			
Q101	8-729-245-83	TRANSISTOR 2SC2458	
Q102	8-765-300-00	TRANSISTOR 2SC2009	
Q103	8-729-204-83	TRANSISTOR 2SA1048GR	
Q104	8-729-900-36	TRANSISTOR DTC124ES	
Q105	8-729-204-83	TRANSISTOR 2SA1048GR	
Q151	8-729-245-83	TRANSISTOR 2SC2458	
Q152	8-729-245-83	TRANSISTOR 2SC2458	
Q153	8-729-245-83	TRANSISTOR 2SC2458	
Q154	8-729-900-89	TRANSISTOR DTC144ES	
Q155	8-729-245-83	TRANSISTOR 2SC2458	
Q156	8-729-245-83	TRANSISTOR 2SC2458	
Q157	8-729-900-89	TRANSISTOR DTC144ES	
Q158	8-729-900-89	TRANSISTOR DTC144ES	
Q172	8-729-204-83	TRANSISTOR 2SA1048GR	
Q173	8-729-245-83	TRANSISTOR 2SC2458	
Q174	8-729-245-83	TRANSISTOR 2SC2458	
Q175	8-729-245-83	TRANSISTOR 2SC2458	
RESISTOR			
R101	1-215-738-91	METAL 1K 5% 1/6W	
R102	1-215-738-91	METAL 1K 5% 1/6W	
R103	1-215-736-91	METAL 100K 5% 1/6W	
R104	1-215-760-91	METAL 8.2K 5% 1/6W	
R105	1-215-760-91	METAL 8.2K 5% 1/6W	
R106	1-215-750-91	METAL 3.3K 5% 1/6W	
R107	1-215-750-91	METAL 3.3K 5% 1/6W	
R108	1-215-798-91	METAL 330K 5% 1/6W	
R109	1-215-746-91	METAL 2.2K 5% 1/6W	
R110	1-215-746-91	METAL 2.2K 5% 1/6W	


Ref.No.	Part No.	Description	Remark
R111	1-215-754-91	METAL 4.7K 5% 1/6W	
R112	1-215-722-91	METAL 220 5% 1/6W	
R113	1-215-752-91	METAL 3.9K 5% 1/6W	
R114	1-215-722-91	METAL 220 5% 1/6W	
R115	1-215-742-91	METAL 1.5K 5% 1/6W	
R116	1-215-730-91	METAL 470 5% 1/6W	
R118	1-215-722-91	METAL 220 5% 1/6W	
R119	1-215-730-91	METAL 470 5% 1/6W	
R120	1-215-778-91	METAL 47K 5% 1/6W	
R122	-215-762-91	METAL 10K 5% 1/6W	
R123	1-215-768-91	METAL 18K 5% 1/6W	
R124	1-215-764-91	METAL 12K 5% 1/6W	
R125	1-215-736-91	METAL 820 5% 1/6W	
R126	1-215-736-91	METAL 820 5% 1/6W	
R127	1-215-736-91	METAL 820 5% 1/6W	
R129	1-215-795-91	METAL 240K 5% 1/6W	
R131	1-215-778-91	METAL 47K 5% 1/6W	
R132	1-215-762-91	METAL 10K 5% 1/6W	
R134	1-215-782-91	METAL 68K 5% 1/6W	
R135	1-215-780-91	METAL 56K 5% 1/6W	
R136	1-215-770-91	METAL 22K 5% 1/6W	
R137	1-215-770-91	METAL 22K 5% 1/6W	
R140	1-215-738-91	METAL 1K 5% 1/6W	
R141	1-215-766-91	METAL 15K 5% 1/6W	
R142	1-215-786-91	METAL 100K 5% 1/6W	
R143	1-215-786-91	METAL 100K 5% 1/6W	
R151	1-212-651-00	METAL 1K 5% 1/6W	
R152	1-215-776-91	METAL 39K 5% 1/6W	
R153	1-215-728-91	METAL 390 5% 1/6W	
R155	1-215-770-91	METAL 22K 5% 1/6W	
R156	1-215-784-91	METAL 82K 5% 1/6W	
R157	1-215-762-91	METAL 10K 5% 1/6W	
R158	1-215-762-91	METAL 10K 5% 1/6W	
R159	1-215-754-91	METAL 4.7K 5% 1/6W	
R160	1-215-754-91	METAL 4.7K 5% 1/6W	
R161	1-215-754-91	METAL 4.7K 5% 1/6W	
R162	1-215-754-91	METAL 4.7K 5% 1/6W	
R166	1-215-750-91	METAL 3.3K 5% 1/6W	
R167	1-215-774-91	METAL 33K 5% 1/6W	
R168	1-215-770-91	METAL 22K 5% 1/6W	
R172	1-215-720-91	METAL 180 5% 1/6W	
R173	1-215-778-91	METAL 47K 5% 1/6W	
R174	1-215-796-91	METAL 270K 5% 1/6W	
R175	1-215-772-91	METAL 27K 5% 1/6W	
R176	1-215-738-91	METAL 1K 5% 1/6W	
R177	1-215-762-91	METAL 10K 5% 1/6W	
R178	1-215-762-91	METAL 10K 5% 1/6W	
R179	1-215-762-91	METAL 10K 5% 1/6W	
R180	1-215-738-91	METAL 1K 5% 1/6W	
R181	1-215-740-91	METAL 1.2K 5% 1/6W	
R182	1-215-746-91	METAL 2.2K 5% 1/6W	
R183	1-215-738-91	METAL 1K 5% 1/6W	
R184	1-215-724-91	METAL 270 5% 1/6W	

Ref.No.	Part No.	Description	Remark
R185	1-215-726-91	METAL 330 5% 1/6W	
R186	1-215-768-91	METAL 18K 5% 1/6W	
R188	1-215-180-00	METAL 15K 5% 1/4W	
R191	1-215-730-91	METAL 470 5% 1/6W	
R192	1-215-730-91	METAL 470 5% 1/6W	
R193	1-215-714-91	METAL 100 5% 1/6W	
VARIABLE RESISTOR			
RV101	1-228-727-00	RES, ADJ, CERAMIC CARBON 47K	
RV151	1-228-726-00	RES, ADJ, CERAMIC CARBON 33K	
FILTER			
SWF101	1-404-438-00	FILTER, SAW	

*A-1325-009-A V BOARD, COMPLETE *****			
CAPACITOR			
C2	1-123-380-00	ELECT 1MF 20% 50V	
C3	1-123-356-00	ELECT 10MF 20% 16V	
C4	1-106-220-00	MYLAR 0.1MF 10% 100V	
C5	1-123-356-00	ELECT 10MF 20% 16V	
C6	1-123-380-00	ELECT 1MF 20% 50V	
C7	1-101-004-00	CERAMIC 0.01MF 50V	
C8	1-123-356-00	CERAMIC 68PF 5% 50V	
C9	1-123-380-00	ELECT 1MF 20% 50V	
C10	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C11	1-106-220-00	MYLAR 0.1MF 10% 100V	
C12	1-101-984-00	CERAMIC 47PF 5% 50V	
C13	1-102-773-00	CERAMIC 330PF 5% 50V	
C14	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C15	1-123-332-00	ELECT 47MF 20% 16V	
C16	1-123-297-85	ELECT 330MF 20% 6.3V	
C17	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C18	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C19	1-102-973-00	CERAMIC 100PF 5% 50V	
C20	1-123-356-00	ELECT 10MF 20% 16V	
C21	1-102-074-00	CERAMIC 0.001MF 10% 50V	
C22	1-123-369-00	ELECT 4.7MF 20% 25V	
C23	1-123-321-00	ELECT 220MF 20% 16V	
C31	1-106-220-00	MYLAR 0.1MF 10% 100V	
C32	1-106-220-00	MYLAR 0.1MF 10% 100V	
C34	1-106-220-00	MYLAR 0.1MF 10% 100V	
C35	1-106-220-00	MYLAR 0.1MF 10% 100V	
C36	1-106-220-00	MYLAR 0.1MF 10% 100V	
C37	1-106-220-00	MYLAR 0.1MF 10% 100V	
C38	1-106-220-00	MYLAR 0.1MF 10% 100V	
C39	1-123-298-00	ELECT 470MF 20% 6.3V	
C40	1-108-620-91	MYLAR 0.0033MF 10% 100V	
C064	1-123-317-81	ELECT 22MF 20% 16V	

3. CHASSIS

- : TA, BV3x8 7-685-646-71
 ●: TA, BV3x12 7-685-648-71

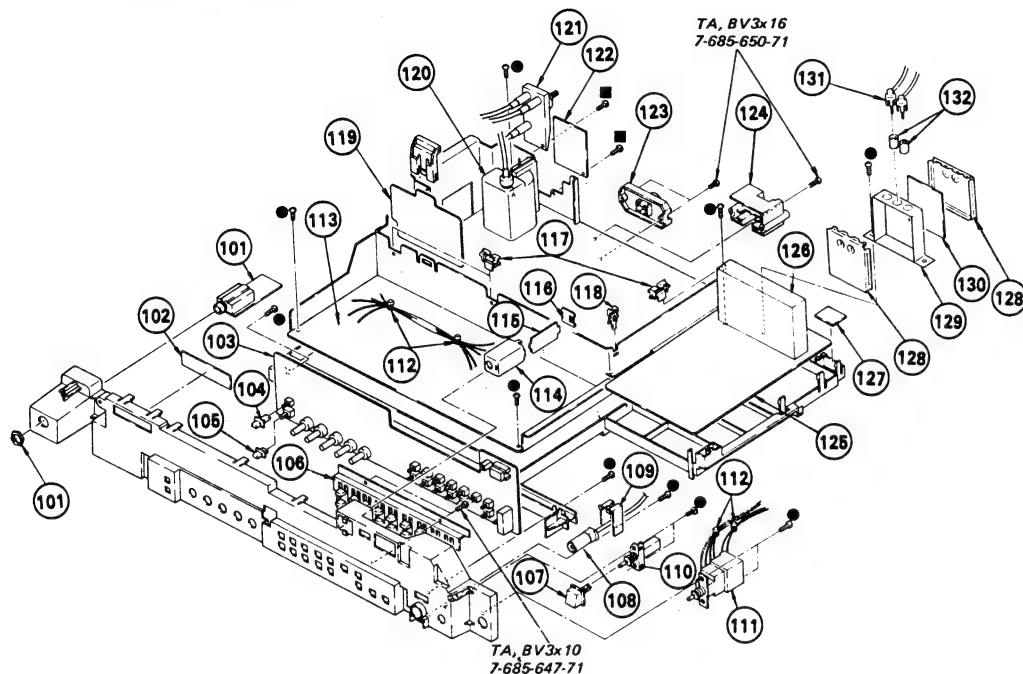

No.	Part No.	Description	Remark	No.	Part No.	Description	Remark
101	*1-611-170-00	J1 BOARD		117	*3-646-071-00	HOLDER, WIRE	
102	*1-611-187-21	H2 BOARD		118	4-343-134-00	RETAINER, AC CORD	
103	*1-611-002-00	H1 BOARD		119	*A-1340-574-A	D1 BOARD, COMPLETE	
104	4-368-610-00	PUSH BUTTON (B)		120	Δ 1-439-332-21	TRANSFORMER, ASSY, FLYBACK	
105	4-362-211-00	PUSH BUTTON		121	Δ 1-215-066-21	RES ASSY, HIGH-VOLTAGE	
106	4-368-612-11	BUTTON, MULTI		122	*1-611-015-00	D2 BOARD	
107	4-369-118-00	BUTTON, HIT SWITCH		123	Δ 1-536-849-11	TERMINAL BOARD ASSY, ANTENNA	
108	Δ 1-557-117-12	SOCKET, PAL ANTENNA (WITH CABLE)		124	*4-368-616-00	BRACKET, CONNECTOR	
109	*4-369-105-11	BRACKET, HIT SWITCH		125	*A-1295-910-A	A BOARD, COMPLETE	
110	Δ 1-552-806-21	SWITCH, PUSH		126	Δ 1-463-421-21	TUNER, ET (BT-883)	126
111	Δ 1-553-225-12	SWITCH, PUSH		127	*1-610-433-00	S2 BOARD	
112	3-701-748-00	CLAMP		128	*4-368-114-00	CASE (LID), RELAY	
113	*A-1345-486-A	D BOARD, COMPLETE	117, 118, 120	129	*4-368-115-00	CASE (MAIN), RELAY	
114	*4-342-117-00	CASE, SHIELD (MAIN), R		130	*1-611-172-00	S BOARD	
115	*1-606-794-00	N BOARD		131	*1-557-261-11	CABLE, P-P	
116	*4-342-118-00	LID, SHIELD CASE, R		132	*1-507-900-00	JACK	

F

A

ELECTRICAL PARTS LIST

NOTE:

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

CAPACITORS
 * MF : μF, PF : μμF

- RESISTORS
 • All resistors are in ohms
 • F : nonflammable

- COILS
 • MH : mH, UH : μH

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
*1-611-017-00 F BOARD *****				CONNECTOR			
A1	*1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P		C102	1-110-175-81	MYLAR	0.1MF 10% 100V
A2	*1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P		C103	1-110-175-81	MYLAR	0.1MF 10% 100V
A3	*1-560-156-00	PLUG, CONNECTOR (2.5MM PITCH)		C104	1-123-356-00	ELECT	10MF 20% 16V
CAPACITOR				C105	1-123-356-00	ELECT	10MF 20% 16V
C1601	Δ 1-117-121-51	PAPER	0.22MF 20% 250V	C106	1-123-318-00	ELECT	33MF 20% 16V
C1603	Δ 1-161-738-12	CERAMIC	0.0047MF 20% 400V	C107	1-123-330-00	ELECT	22MF 20% 16V
C1604	Δ 1-161-738-12	CERAMIC	0.0047MF 20% 400V	C108	1-110-173-81	MYLAR	0.068MF 10% 100V
C1655	1-123-332-00	ELECT	47MF 20% 16V	C109	1-110-173-81	MYLAR	0.068MF 10% 100V
C1668	1-123-346-00	ELECT	220MF 20% 35V	C110	1-102-963-00	CERAMIC	33PF 5% 50V
DIODE				C111	1-123-318-00	ELECT	33MF 20% 16V
D1658	8-719-000-06	DIODE MC921		C112	1-102-530-00	CERAMIC	120PF 5% 50V
CONNECTOR				C113	1-102-529-00	CERAMIC	100PF 5% 50V
F1	*1-506-349-21	3P PLUG (L)		C114	1-102-851-00	CERAMIC	15PF 5% 50V
F2	*1-508-765-00	3P PLUG (M)		C115	1-102-523-00	CERAMIC	56PF 5% 50V
F3	*1-508-786-00	2P PLUG (M)		C116	1-102-125-00	CERAMIC	0.0047MF 10% 50V
F4	*1-506-349-21	3P PLUG (L)		C117	1-102-125-00	CERAMIC	0.0047MF 10% 50V
F5	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)		C118	1-102-125-00	CERAMIC	0.0047MF 10% 50V
F6	*1-506-349-21	3P PLUG (L)		C119	1-102-125-00	CERAMIC	0.0047MF 10% 50V
FUSE				C119	1-102-125-00	CERAMIC	0.0047MF 10% 50V
F1601	Δ 1-532-465-51	FUSE, TIME LAG 3.15A		C120	1-102-125-00	CERAMIC	0.0047MF 10% 50V
	1-533-149-00	HOLDER, FUSE; F1601		C121	1-102-125-00	CERAMIC	0.0047MF 10% 50V
IC				C123	1-102-108-00	CERAMIC	150PF 10% 50V
IC1652	8-759-178-12	IC UPC78L12		C124	1-130-014-00	FILM	470PF 5% 50V
THERMISTOR				C126	1-123-318-00	ELECT	33MF 20% 16V
PTH1601	Δ 1-806-387-11	THERMISTOR (POSITIVE)		C127	1-102-125-00	CERAMIC	0.0047MF 10% 50V
RESISTOR				C128	1-101-004-00	CERAMIC	0.01MF 50V
R1601	Δ 1-217-328-11	WIREWOUND	2.7 10% 7W F	C129	1-101-004-00	CERAMIC	0.01MF 50V
R1602	Δ 1-214-937-81	METAL	1M 1% 1/2W	C130	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R1603	Δ 1-247-289-11	CARBON	8.2M 5% 1W	C131	1-123-381-00	ELECT	2.2MF 20% 50V
R1614	Δ 1-205-653-11	CEMENTED	100 5% 5W	C132	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R1675	Δ 1-202-854-11	SOLID	10 1/4W F	C133	1-102-125-00	CERAMIC	0.0047MF 10% 50V
R1676	Δ 1-202-854-11	SOLID	10 1/4W F	C134	1-102-125-00	CERAMIC	0.0047MF 10% 50V
TRANSFORMER				C135	1-102-525-00	CERAMIC	68PF 5% 50V
T1601	Δ 1-421-352-11	TRANSFORMER, FERRITE		C136	1-102-525-00	CERAMIC	68PF 5% 50V
T1603	Δ 1-447-703-12	TRANSFORMER, POWER		C137	1-102-125-00	CERAMIC	0.0047MF 10% 50V
*****				C138	1-123-286-00	ELECT	0.33MF 20% 50V
	*A-1295-910-A	A BOARD, COMPLETE		C139	1-102-125-00	CERAMIC	0.0047MF 10% 50V
		*****		C140	1-102-125-00	CERAMIC	0.0047MF 10% 50V
Δ 1-463-421-21	TUNER, ET (BT-883)			C141	1-123-318-00	ELECT	33MF 20% 16V
*4-363-672-00	CASE (MAIN), SHIELD, VIF			C142	1-102-525-00	CERAMIC	68PF 5% 50V
*4-363-673-00	CASE (BOTTOM LID), SHIELD, VIF			C143	1-101-004-00	CERAMIC	0.01MF 50V
*4-363-674-00	CASE (UPPER LID), SHIELD, VIF			C144	1-123-286-00	ELECT	0.33MF 20% 50V
				C145	1-102-961-00	CERAMIC	27PF 5% 50V
				C146	1-123-380-00	ELECT	1MF 20% 50V
				C151	1-101-004-00	CERAMIC	0.01MF 50V
				C152	1-101-004-00	CERAMIC	0.01MF 50V

C

ef.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	
CONNECTOR				RESISTOR				VARIABLE RESISTOR				COIL				
CN1	*1-560-852-00	PLUG, CONNECTOR 7P		Q11	8-729-245-83	TRANSISTOR 25C2458		R65	1-215-716-91	METAL 120 5% 1/6W		D707	8-719-911-19	DIODE 1SS119		
CN2	*1-560-852-00	PLUG, CONNECTOR 7P		Q12	8-729-245-83	TRANSISTOR 25C2458		R66	1-215-716-91	METAL 120 5% 1/6W		D708	8-719-911-19	DIODE 1SS119		
CN3	*1-560-852-00	PLUG, CONNECTOR 7P		Q13	8-729-245-83	TRANSISTOR 25C2458		R67	1-215-716-91	METAL 120 5% 1/6W		D709	8-719-911-19	DIODE 1SS119		
V1	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		Q14	8-729-245-83	TRANSISTOR 25C2458		VARIABLE RESISTOR				D710	8-719-911-19	DIODE 1SS119		
V2	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		RESISTOR				VARIABLE RESISTOR				D711	8-719-911-19	DIODE 1SS119		
R4	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		R1	1-215-786-91	METAL 100K 5% 1/6W		RV1	1-228-724-00	RES, ADJ, CARBON 10K		COIL				
R5	*1-560-124-00	PLUG, CONNECTOR (2.5MM PITCH)		R2	1-215-758-91	METAL 6.8K 5% 1/6W		RV2	1-226-852-00	RES, ADJ, CARBON 22K		L751	1-408-413-00	MICRO INDUCTOR 22UH		
R6	*1-508-784-00	1P PLUG		R3	1-215-758-91	METAL 6.8K 5% 1/6W		RV3	1-228-881-00	RES, ADJ, CARBON 100		NEON LAMP				
R9	*1-560-126-00	PLUG, CONNECTOR (2.5MM PITCH)		R4	1-215-738-91	METAL 1K 5% 1/6W		COIL				NEON LAMP				
V11	*1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P		R5	1-215-742-91	METAL 1.5K 5% 1/6W		T1	1-404-292-00	COIL		NL701	1-519-108-XX	LAMP, NEON ASSY		
V12	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P		R6	1-215-774-91	METAL 33K 5% 1/6W		CRYSTAL				TRANSISTOR				
V13	*1-560-127-00	PLUG, CONNECTOR (2.5MM) 7P		R7	1-215-740-91	METAL 1.2K 5% 1/6W		X01	1-567-162-00	OSCILLATOR, CRYSTAL		Q701	8-729-245-83	TRANSISTOR 25C2458		
TRIMMER				R8	1-215-740-91	METAL 1.2K 5% 1/6W		*****				Q702	8-729-245-83	TRANSISTOR 25C2458		
CV1	1-141-181-11	CAP, TRIMMER		R9	1-215-734-91	METAL 680 5% 1/6W		*A-1330-475-A C BOARD, COMPLETE *****				Q703	8-729-245-83	TRANSISTOR 25C2458		
DIODE				R10	1-215-742-91	METAL 1.5K 5% 1/6W		1-526-644-41 SOCKET, CRT				Q704	8-729-322-78	TRANSISTOR 25C2278		
D1	8-719-100-68	DIODE RD13E-B2		R11	1-215-740-91	METAL 1.2K 5% 1/6W		CONNECTOR				Q705	8-729-322-78	TRANSISTOR 25C2278		
D2	8-719-100-36	DIODE RD5.6E-B3		R12	1-215-730-91	METAL 470 5% 1/6W		C1	*1-508-765-00	3P PLUG (M)		Q706	8-729-255-12	TRANSISTOR 25C2551		
D3	8-719-100-36	DIODE RD5.6E-B3		R13	1-215-730-91	METAL 470 5% 1/6W		C2	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)		Q707	8-729-255-12	TRANSISTOR 25C2551		
D4	8-719-911-19	DIODE 1SS119		R14	1-213-139-00	METAL OXIDE 470 5% 1W	F	C3	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P		Q708	8-729-255-12	TRANSISTOR 25C2551		
D5	8-719-911-19	DIODE 1SS119		R15	1-247-228-00	CARBON 330 5% 1/2W		CAPACITOR				Q709	8-729-255-12	TRANSISTOR 25C2551		
D6	8-719-911-19	DIODE 1SS119		R16	1-215-738-91	METAL 1K 5% 1/6W		C701	1-102-973-00	CERAMIC 100PF 5% 50V		Q710	8-729-200-17	TRANSISTOR 2SA1091		
D7	8-719-911-19	DIODE 1SS119		R22	1-215-786-91	METAL 100K 5% 1/6W		C702	1-102-973-00	CERAMIC 100PF 5% 50V		Q711	8-729-200-17	TRANSISTOR 2SA1091		
IC				R26	1-215-718-91	METAL 150 5% 1/6W		C703	1-102-973-00	CERAMIC 100PF 5% 50V		Q712	8-729-200-17	TRANSISTOR 2SA1091		
IC1	8-759-950-30	IC SAA5030		R27	1-215-718-91	METAL 150 5% 1/6W		C704	1-121-759-00	ELECT 4.7MF 250V		Q713	8-729-245-83	TRANSISTOR 25C2458		
IC2	8-759-960-40	IC SAA5040B		R28	1-215-718-91	METAL 150 5% 1/6W		C705	1-102-249-00	CERAMIC 680PF 20% 2KV		Q751	8-729-245-83	TRANSISTOR 25C2458		
IC3	8-759-950-20	IC SAA5020		R29	1-215-710-91	METAL 68 5% 1/6W		CAPACITOR				Q752	8-729-245-83	TRANSISTOR 25C2458		
IC4	8-759-950-50	IC SAA5050		R30	1-215-762-91	METAL 10K 5% 1/6W		C701	1-102-973-00	CERAMIC 100PF 5% 50V		Q753	8-729-103-43	TRANSISTOR 25B734		
IC5	8-759-901-28	IC MSM5128-12RS		R31	1-215-738-91	METAL 1K 5% 1/6W		C702	1-102-973-00	CERAMIC 100PF 5% 50V		Q754	8-729-177-43	TRANSISTOR 25D774		
IC6	8-759-900-02	IC SN74LS02N		R32	1-215-756-91	METAL 5.6K 5% 1/6W		C703	1-102-973-00	CERAMIC 100PF 5% 50V		RESISTOR				
IC7	8-759-900-83	IC SN74LS83AN		R33	1-215-776-91	METAL 39K 5% 1/6W		C704	1-121-759-00	ELECT 4.7MF 250V		R701	1-215-762-91	METAL 10K 5% 1/6W		
IC8	8-759-901-61	IC SN74LS161AN		R34	1-215-754-91	METAL 4.7K 5% 1/6W		C705	1-102-249-00	CERAMIC 680PF 20% 2KV		R702	1-215-762-91	METAL 10K 5% 1/6W		
IC9	8-759-901-61	IC SN74LS161AN		R35	1-215-746-91	METAL 2.2K 5% 1/6W		C706	1-129-779-00	FILM 0.022MF 20% 1KV		R703	1-215-762-91	METAL 10K 5% 1/6W		
COIL				R36	1-215-778-91	METAL 47K 5% 1/6W		C707	1-123-383-00	ELECT 4.7MF 20% 100V		R704	1-215-744-91	METAL 1.8K 5% 1/6W		
L1	1-404-291-00	COIL		R37	1-215-772-91	METAL 27K 5% 1/6W		C708	1-123-333-00	ELECT 100MF 20% 25V		R705	1-215-744-91	METAL 1.8K 5% 1/6W		
TRANSISTOR				R38	1-215-738-91	METAL 1K 5% 1/6W		C711	1-123-356-00	ELECT 10MF 20% 50V		RESISTOR				
Q1	8-729-109-53	TRANSISTOR 25D795A		R39	1-215-760-91	METAL 8.2K 5% 1/6W		C751	1-101-361-00	CERAMIC 150PF 5% 50V		R706	1-215-744-91	METAL 1.8K 5% 1/6W		
Q2	8-729-109-53	TRANSISTOR 25D795A		R40	1-215-758-91	METAL 6.8K 5% 1/6W		C752	1-106-178-00	MYLAR 0.0018MF 10% 100V		R707	1-215-762-91	METAL 10K 5% 1/6W		
Q3	8-729-245-83	TRANSISTOR 25C2458		R41	1-215-746-91	METAL 2.2K 5% 1/6W		C753	1-110-190-81	MYLAR 0.01MF 10% 400V		R708	1-215-762-91	METAL 10K 5% 1/6W		
Q4	8-729-245-83	TRANSISTOR 25C2458		R42	1-215-728-91	METAL 390 5% 1/6W		C754	1-110-190-81	MYLAR 0.01MF 10% 400V		R709	1-215-762-91	METAL 10K 5% 1/6W		
Q5	8-729-204-83	TRANSISTOR 25A1048GR		R43	1-215-740-91	METAL 1.2K 5% 1/6W		C757	1-110-175-81	MYLAR 0.1MF 10% 100V		R710	1-215-733-91	METAL 620 5% 1/6W		
Q6	8-729-204-83	TRANSISTOR 25A1048GR		R44	1-215-738-91	METAL 1K 5% 1/6W		C759	1-123-356-00	ELECT 10MF 20% 50V		R711	1-215-733-91	METAL 620 5% 1/6W		
Q7	8-729-204-83	TRANSISTOR 25A1048GR		R45	1-215-758-91	METAL 6.8K 5% 1/6W		C760	1-123-372-00	ELECT 33MF 20% 50V		R712	1-215-733-91	METAL 620 5% 1/6W		
Q8	8-729-245-83	TRANSISTOR 25C2458		R46	1-215-762-91	METAL 10K 5% 1/6W		C761	1-101-006-00	CERAMIC 0.047MF 50V		R713	1-206-692-00	METAL OXIDE 15K 5% 2W	F	
Q9	8-729-245-83	TRANSISTOR 25C2458		R48	1-215-770-91	METAL 22K 5% 1/6W		DIODE				R714	1-206-692-00	METAL OXIDE 15K 5% 2W	F	
Q10	8-729-245-83	TRANSISTOR 25C2458		R56	1-215-762-91	METAL 10K 5% 1/6W		D701	8-719-911-19	DIODE 1SS119		R715	1-206-692-00	METAL OXIDE 15K 5% 2W	F	
Q6	8-729-204-83	TRANSISTOR 25A1048GR		R60	1-215-786-91	METAL 100K 5% 1/6W		D702	8-719-911-19	DIODE 1SS119		R716	1-247-038-00	CARBON 560 5% 1/8W	F	
Q7	8-729-204-83	TRANSISTOR 25A1048GR		R61	1-215-786-91	METAL 100K 5% 1/6W		D703	8-719-911-19	DIODE 1SS119		R717	1-247-038-00	CARBON 560 5% 1/8W	F	
Q8	8-729-245-83	TRANSISTOR 25C2458		R62	1-215-722-91	METAL 220 5% 1/6W		D704	8-719-100-68	DIODE RD13E-B2		R718	1-247-038-00	CARBON 560 5% 1/8W	F	
Q9	8-729-245-83	TRANSISTOR 25C2458		R63	1-215-740-91	METAL 1.2K 5% 1/6W		D705	8-719-911-19	DIODE 1SS119		R719	1-213-163-00	METAL OXIDE 47K 5% 1W	F	
Q10	8-729-245-83	TRANSISTOR 25C2458		R64	1-215-734-91	METAL 680 5% 1/6W		D706	8-719-911-19	DIODE 1SS119		R720	1-213-163-00	METAL OXIDE 47K 5% 1W	F	



Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark
D24	*1-508-784-00	1P PLUG		D801	8-719-900-26	DIODE ERD29-08J		TRANSISTOR			
D80	*1-560-290-00	PLUG, CONNECTOR (2.5MM PITCH)		D802	8-719-903-09	DIODE V30M		RESISTOR			
D91	*1-560-123-00	PLUG, CONNECTOR (2.5MM) 3P		D803	8-719-901-93	DIODE V19E		R001	1-215-738-91	METAL	1K 5% 1/6W
DY1	*1-508-765-00	3P PLUG (M)		D804	8-719-901-93	DIODE V19E		R002	1-215-738-91	METAL	1K 5% 1/6W
DY2	*1-508-765-00	3P PLUG (M)		D805	8-719-305-15	DIODE GH3F		R003	1-215-738-91	METAL	1K 5% 1/6W
DY3	*1-508-766-00	4P PLUG (M)		D806	8-719-305-15	DIODE GH3F		R004	1-215-722-91	METAL	220 5% 1/6W
DIODE				D810	8-719-907-40	DIODE ERB43-02		R005	1-215-722-91	METAL	220 5% 1/6W
D001	8-719-911-19	DIODE ISS119		DELAY LINE				R006	1-215-722-91	METAL	220 5% 1/6W
D002	8-719-911-19	DIODE ISS119		DL301	1-415-336-00	DELAY LINE, Y		R007	1-215-722-91	METAL	220 5% 1/6W
D004	8-719-911-19	DIODE ISS119		DL302	1-415-185-12	DELAY LINE (1H)		R008	1-215-722-91	METAL	220 5% 1/6W
D005	8-759-157-41	IC UPC574J-G		IC				R009	1-215-722-91	METAL	220 5% 1/6W
D006	8-719-101-02	DIODE RD30E-B4		IC001	8-759-602-09	IC CX523-110P		R010	1-215-722-91	METAL	220 5% 1/6W
D008	8-719-911-19	DIODE ISS119		IC002	8-759-600-92	IC M58657P		R011	1-215-714-91	METAL	100 5% 1/6W
D009	8-719-101-35	DIODE RD3.0E-L2		IC201	8-759-340-53	IC HD140538P		R012	1-215-706-91	METAL	47 5% 1/6W
D010	8-719-911-19	DIODE ISS119		IC251	8-759-276-30	IC TA7630P		R014	1-215-754-91	METAL	4.7K 5% 1/6W
D060	8-719-911-19	DIODE ISS119		IC252	8-749-943-62	IC STK-4362		R015	1-215-754-91	METAL	4.7K 5% 1/6W
D061	8-719-100-35	DIODE RD5.6E-B2		IC301	6-066-720-60	IC TDA3562A		R016	1-215-168-00	METAL	4.7K 5% 1/4W
D080	8-719-911-19	DIODE ISS119		IC551	8-759-907-56	IC TDA2578A		R018	1-215-738-91	METAL	1K 5% 1/6W
D081	8-719-911-19	DIODE ISS119		IC552	8-759-907-57	IC TDA3652		R019	1-215-782-91	METAL	68K 5% 1/6W
D201	8-719-911-19	DIODE ISS119		IC651	8-759-100-75	IC UPC1394C		R021	1-215-766-91	METAL	15K 5% 1/6W
D202	8-719-911-19	DIODE ISS119		COIL				R022	1-215-766-91	METAL	15K 5% 1/6W
D203	8-719-911-19	DIODE ISS119		L251	1-408-300-00	MICRO INDUCTOR 6.8UH		R023	1-215-714-91	METAL	100 5% 1/6W
D204	8-719-911-19	DIODE ISS119		L252	1-408-300-00	MICRO INDUCTOR 6.8UH		R024	1-215-180-00	METAL	15K 5% 1/4W
D205	8-719-911-19	DIODE ISS119		L253	1-408-300-00	MICRO INDUCTOR 6.8UH		R025	1-215-770-91	METAL	22K 5% 1/6W
D206	8-719-911-19	DIODE ISS119		L301	1-404-495-00	COIL		R027	1-215-770-91	METAL	22K 5% 1/6W
D208	8-719-100-66	DIODE RD12E-B3		L302	1-408-421-00	MICRO INDUCTOR 100UH		R028	1-215-770-91	METAL	22K 5% 1/6W
D251	8-719-100-43	DIODE RD7.5E-B1		L304	1-408-411-00	MICRO INDUCTOR 15UH		R029	1-215-770-91	METAL	22K 5% 1/6W
D252	8-719-911-19	DIODE ISS119		L305	1-408-227-00	MICRO INDUCTOR 470UH		R030	1-215-770-91	METAL	22K 5% 1/6W
D301	8-719-911-19	DIODE ISS119		L306	1-404-494-00	COIL		R031	1-215-770-91	METAL	22K 5% 1/6W
D303	8-719-911-19	DIODE ISS119		L307	1-404-498-00	COIL		R032	1-215-770-91	METAL	22K 5% 1/6W
D307	8-719-911-19	DIODE ISS119		L308	1-408-415-00	MICRO INDUCTOR 33UH		R033	1-215-770-91	METAL	22K 5% 1/6W
D308	8-719-911-19	DIODE ISS119		L309	1-408-414-00	MICRO INDUCTOR 27UH		R034	1-215-770-91	METAL	22K 5% 1/6W
D309	8-719-911-19	DIODE ISS119		L601	1-407-365-00	COIL, CHOKE		R035	1-215-770-91	METAL	22K 5% 1/6W
D501	8-719-200-02	DIODE 10E2		L651	1-425-613-00	COIL, AIR-CORE, QF TYPE		R037	1-215-738-91	METAL	1K 5% 1/6W
D502	8-719-931-22	DIODE EQB01-22		L652	1-459-442-00	COIL (WITH CORE)		R038	1-215-748-91	METAL	2.7K 5% 1/6W
D503	8-719-992-42	DIODE EQA01-24R2		L801	1-407-365-00	COIL, CHOKE		R039	1-215-714-91	METAL	100 5% 1/6W
D504	8-719-102-78	DIODE RD6.8E-N2		L802	1-408-225-00	MICRO INDUCTOR 3.3UH		R040	1-215-770-91	METAL	22K 5% 1/6W
D506	8-719-911-19	DIODE ISS119		L803	1-459-224-00	HLC		R041	1-215-774-91	METAL	33K 5% 1/6W
D507	8-719-911-19	DIODE ISS119		L804	1-421-390-00	COIL, FERRITE (PMC)		R042	1-215-730-91	METAL	470 5% 1/6W
D508	8-719-911-19	DIODE ISS119		L805	1-408-239-00	MICRO INDUCTOR 4.7MMH		R043	1-215-730-91	METAL	470 5% 1/6W
D601	8-719-503-06	DIODE S34860Z		L806	1-421-329-00	COIL, CHOKE		R044	1-215-738-91	METAL	1K 5% 1/6W
D602	8-719-901-93	DIODE V19E		L807	1-408-225-00	MICRO INDUCTOR 3.3UH		R045	1-215-738-91	METAL	1K 5% 1/6W
D603	8-719-911-19	DIODE ISS119		L808	1-407-365-00	COIL, CHOKE		R046	1-215-754-91	METAL	4.7K 5% 1/6W
D651	8-719-928-08	DIODE ERD28-08		L809	1-437-090-00	HOT		R047	1-215-714-91	METAL	100 5% 1/6W
D652	8-719-901-93	DIODE V19E		L810	1-408-240-00	MICRO INDUCTOR 6.8MMH		R048	1-215-778-91	METAL	47K 5% 1/6W
D653	8-719-901-93	DIODE V19E		L811	1-407-365-00	COIL, CHOKE		R049	1-215-770-91	METAL	22K 5% 1/6W
D654	8-719-300-59	DIODE CTU12S		L891	1-459-443-00	COIL, FERRITE		R050	1-215-738-91	METAL	1K 5% 1/6W
D655	8-719-901-93	DIODE V19E						R051	1-215-738-91	METAL	1K 5% 1/6W
D656	8-719-982-04	DIODE ERB81-004						R052	1-215-738-91	METAL	1K 5% 1/6W
D657	8-719-102-68	DIODE RD5.1E-N2						R053	1-215-790-91	METAL	150K 5% 1/6W
D659	8-719-911-19	DIODE ISS119						R055	1-215-754-91	METAL	4.7K 5% 1/6W
D661	8-719-102-78	DIODE RD6.8E-N2						R056	1-215-766-91	METAL	15K 5% 1/6W
								R057	1-215-762-91	METAL	10K 5% 1/6W

D

D

Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark	Ref.No.	Part No.	Description	Remark								
C208	1-123-380-00	ELECT	1MF	20%	50V	C301	1-102-944-00	CERAMIC	7PF	1PF	50V	C513	1-123-356-00	ELECT	10MF	20%	50V	C672	1-102-106-00	CERAMIC	100PF	10%	50V
C209	1-102-114-00	CERAMIC	470PF	10%	50V	C302	1-102-944-00	CERAMIC	7PF	1PF	50V	C514	1-136-173-00	FILM	0.47MF	5%	50V	C801	1-102-038-00	CERAMIC	0.001MF		500V
C210	1-102-074-00	CERAMIC	0.001MF	10%	50V	C304	1-101-006-00	CERAMIC	0.047MF		50V	C515	1-123-337-00	ELECT	1000MF	20%	25V	C802	1-106-359-00	MYLAR	0.0047MF	10%	200V
C211	1-123-380-00	ELECT	1MF	20%	50V	C305	1-101-006-00	CERAMIC	0.047MF		50V	C516	1-108-620-91	MYLAR	0.0033MF	10%	100V	C803	1-102-327-11	CERAMIC	330PF	15%	1.5KV
C212	1-102-114-00	CERAMIC	470PF	10%	50V	C307	1-102-971-00	CERAMIC	82PF	5%	50V	C517	1-131-371-00	TANTALUM	10MF	20%	16V	C804	1-161-754-11	CERAMIC	0.001MF	10%	3KV
C213	1-102-074-00	CERAMIC	0.001MF	10%	50V	C308	1-123-356-00	ELECT	10MF	20%	16V	C518	1-110-175-81	MYLAR	0.1MF	10%	100V	C805	1-110-192-81	MYLAR	0.015MF	10%	400V
C214	1-123-309-00	ELECT	330MF	20%	10V	C309	1-102-113-00	CERAMIC	390PF	10%	50V	C519	1-108-614-91	MYLAR	0.001MF	10%	100V	C806	1-129-722-00	FILM	0.047MF	10%	630V
C215	1-123-332-00	ELECT	47MF	20%	16V	C310	1-101-004-00	CERAMIC	0.01MF		50V	C520	1-123-333-00	ELECT	100MF	20%	25V	C807	1-136-186-00	FILM	2.4MF	5%	200V
C216	1-110-184-81	MYLAR	0.033MF	10%	250V	C311	1-123-323-00	ELECT	470MF	20%	16V	C521	1-110-190-81	MYLAR	0.01MF	10%	400V	C808	1-136-116-00	FILM	1MF	5%	200V
C217	1-123-356-00	ELECT	10MF	20%	16V	C312	1-123-286-00	ELECT	0.33MF	20%	50V	C523	1-123-381-00	ELECT	2.2MF	20%	50V	C810	1-123-190-81	MYLAR	0.01MF	10%	400V
C218	1-123-332-00	ELECT	47MF	20%	16V	C313	1-123-356-00	ELECT	10MF	20%	16V	C523A	1-123-381-00	ELECT	2.2MF	20%	50V	C811	1-123-379-00	ELECT	0.47MF	20%	50V
C219	1-123-380-00	ELECT	1MF	20%	50V	C314	1-123-381-00	ELECT	2.2MF	20%	50V	C525	1-123-330-00	ELECT	22MF	20%	16V	C812	1-102-223-00	CERAMIC	0.0047MF	10%	2KV
C220	1-123-380-00	ELECT	1MF	20%	50V	C315	1-123-381-00	ELECT	2.2MF	20%	50V	C526	1-123-349-00	ELECT	1000MF	20%	35V	C813	1-110-175-81	MYLAR	0.1MF	10%	100V
C221	1-102-108-00	CERAMIC	150PF	10%	50V	C317	1-110-182-81	MYLAR	0.022MF	10%	250V	C527	1-110-186-81	MYLAR	0.0047MF	10%	400V	C814	1-123-005-00	ELECT	22MF		250V
C222	1-101-004-00	CERAMIC	0.01MF		50V	C318	1-131-345-00	TANTALUM	0.47MF	20%	35V	C529	1-123-318-00	ELECT	33MF	20%	16V	C815	1-123-348-00	ELECT	470MF	20%	35V
C223	1-123-333-00	ELECT	100MF	20%	16V	C319	1-123-356-00	ELECT	10MF	20%	16V	C530	1-108-794-91	MYLAR	0.0015MF	5%	50V	C816	1-102-030-00	CERAMIC	330PF	10%	500V
C224	1-110-184-81	MYLAR	0.033MF	10%	250V	C320	1-123-380-00	ELECT	1MF	20%	50V	C531	1-123-356-00	ELECT	10MF	20%	16V	C818	1-130-894-00	FILM	0.022MF	3%	1.2KV
C249	1-123-379-00	ELECT	0.47MF	20%	50V	C321	1-131-345-00	TANTALUM	0.47MF	20%	35V	C532	1-123-332-00	ELECT	47MF	20%	16V	C819	1-130-061-00	FILM	0.0015MF	10%	630V
C250	1-102-108-00	CERAMIC	150PF	10%	50V	C322	1-131-345-00	TANTALUM	0.47MF	20%	35V	C533	1-123-306-00	ELECT	47MF	20%	10V	C824	1-110-182-81	MYLAR	0.022MF	10%	250V
C251	1-123-379-00	ELECT	0.47MF	20%	50V	C323	1-102-110-00	CERAMIC	220PF	10%	50V	C534	1-123-332-00	ELECT	47MF	20%	16V	C825	1-136-184-00	MYLAR	0.68MF	10%	250V
C252	1-123-380-00	ELECT	1MF	20%	50V	C324	1-102-110-00	CERAMIC	220PF	10%	50V	C536	1-123-356-00	ELECT	10MF	20%	50V	C827	1-102-038-00	CERAMIC	0.001MF		500V
C253	1-123-380-00	ELECT	1MF	20%	50V	C325	1-136-173-00	FILM	0.47MF	5%	50V	C591	1-136-173-00	FILM	0.47MF	5%	50V	C828	1-102-114-00	CERAMIC	470PF	10%	50V
C254	1-123-380-00	ELECT	1MF	20%	50V	C326	1-136-173-00	FILM	0.47MF	5%	50V	C596	1-110-188-81	MYLAR	0.0068MF	10%	400V						
C255	1-123-380-00	ELECT	1MF	20%	50V	C327	1-121-705-00	ELECT	2.2MF	30%	25V	C597	1-102-980-00	CERAMIC	270PF	5%	50V						
C256	1-110-186-81	MYLAR	0.0047MF	10%	400V	C328	1-102-973-00	CERAMIC	100PF	5%	50V	C602	1-117-119-51	PAPER	0.1MF	20%	250V						
C257	1-110-176-81	MYLAR	0.12MF	10%	100V	C329	1-101-004-00	CERAMIC	0.01MF		50V	C605	1-161-738-12	CERAMIC	0.0047MF	20%	400V						
C258	1-110-186-81	MYLAR	0.0047MF	10%	400V	C331	1-102-129-00	CERAMIC	0.01MF	10%	50V	C606	1-161-738-12	CERAMIC	0.0047MF	20%	400V						
C259	1-110-176-81	MYLAR	0.12MF	10%	100V	C332	1-102-973-00	CERAMIC	100PF	5%	50V	C607	1-161-964-61	CERAMIC	0.0047MF	250V							
C260	1-123-323-00	ELECT	470MF	20%	16V	C333	1-123-356-00	ELECT	10MF	20%	16V	C608	1-161-964-61	CERAMIC	0.0047MF	250V							
C261	1-123-379-00	ELECT	0.47MF	20%	50V	C334	1-123-356-00	ELECT	10MF	20%	16V	C609	1-161-964-00	CERAMIC	0.0047MF	250V							
C262	1-110-184-81	MYLAR	0.033MF	10%	250V	C335	1-136-173-00	FILM	0.47MF	5%	50V	C610	1-125-167-00	ELECT(BLOCK)	250MF		400V						
C263	1-102-114-00	CERAMIC	470PF	10%	50V	C336	1-102-858-00	CERAMIC	10PF	0.5PF	50V	C611	1-110-182-81	MYLAR	0.022MF	10%	250V						
C264	1-123-330-00	ELECT	22MF	20%	16V	C337	1-102-888-00	CERAMIC	150PF	5%	50V	C612	1-136-064-00	FILM	0.002MF	3%	2KV						
C265	1-123-379-00	ELECT	0.47MF	20%	50V	C337A	1-102-676-00	CERAMIC	68PF	5%	50V	C613	1-123-381-00	ELECT	2.2MF	20%	100V						
C266	1-102-108-00	CERAMIC	150PF	10%	50V	C338	1-102-884-00	CERAMIC	33PF	5%	50V	C615	1-123-382-00	ELECT	3.3MF	20%	50V						
C267	1-123-379-00	ELECT	0.47MF	20%	50V	C339	1-102-959-00	CERAMIC	22PF	5%	50V	C616	1-102-121-00	CERAMIC	0.0022MF	10%	50V						
C268	1-102-114-00	CERAMIC	470PF	10%	50V	C340	1-102-945-00	CERAMIC	8PF	1PF	50V	C617	1-123-382-00	ELECT	3.3MF	20%	50V						
C269	1-123-379-00	ELECT	0.47MF	20%	50V	C341	1-102-947-00	CERAMIC	10PF	5%	50V	C618	1-106-343-00	MYLAR	0.001MF	10%	200V						
C270	1-123-330-00	ELECT	22MF	20%	16V	C343	1-102-973-00	CERAMIC	100PF	5%	50V	C619	1-123-006-00	ELECT	3.3MF	350V							
C271	1-123-379-00	ELECT	0.47MF	20%	50V	C344	1-123-379-00	ELECT	0.47MF	20%	50V	C651	1-102-155-00	CERAMIC	330PF	20%	2KV						
C272	1-110-175-81	MYLAR	0.1MF	10%	100V	C345	1-110-177-81	MYLAR	0.15MF	10%	100V	C652	1-124-347-00	ELECT	100MF	20%	160V						
C273	1-123-359-00	ELECT	47MF	20%	50V	C346	1-123-333-00	ELECT	100MF	20%	16V	C653	1-124-512-51	ELECT	33MF	20%	50V						
C274	1-123-364-00	ELECT	1000MF	20%	50V	C347	1-110-186-81	MYLAR	0.0047MF	10%	400V	C654	1-123-364-00	ELECT	1000MF	20%	50V						
C276	1-123-359-00	ELECT	47MF	20%	50V	C503	1-110-190-81	MYLAR	0.01MF	10%	400V	C656	1-123-606-00	ELECT	1000MF	20%	25V						
C277	1-110-175-81	MYLAR	0.1MF	10%	100V	C504	1-130-019-00	FILM	0.0012MF	5%	50V	C657	1-123-311-00	ELECT	1000MF	20%	10V						
C278	1-123-364-00	ELECT	1000MF	20%	50V	C505	1-110-175-81	MYLAR	0.1MF	10%	100V	C659	1-123-382-00	ELECT	3.3MF	20%	50V						
C279	1-123-331-89	ELECT	33MF	20%	25V	C506	1-123-308-00	ELECT	220MF	20%	6.3V	C660	1-123-380-00	ELECT	1MF	20%	50V						
C280	1-123-364-00	ELECT	1000MF	20%	50V	C507	1-123-321-00	ELECT	220MF	20%	16V	C661	1-110-187-81	MYLAR	0.0056MF	10%	400V						
C281	1-123-360-00	ELECT																					

D

Ref.No.	Part No.	Description	Remark
R058	1-215-786-91	METAL	
R059	1-215-762-91	METAL	
R060	1-215-726-91	METAL	
R080	1-215-754-91	METAL	
R081	1-215-766-91	METAL	
R201	1-215-776-91	METAL	
R203	1-215-711-91	METAL	
R207	1-215-774-91	METAL	
R208	1-215-770-91	METAL	
R209	1-215-168-00	METAL	
R210	1-215-168-00	METAL	
R211	1-215-738-91	METAL	
R212	1-215-728-91	METAL	
R213	1-215-690-91	METAL	
R214	1-215-718-91	METAL	
R215	1-215-738-91	METAL	
R216	1-215-738-91	METAL	
R217	1-215-762-91	METAL	
R218	1-215-711-91	METAL	
R219	1-247-031-00	CARBON	
R220	1-215-738-91	METAL	
R221	1-215-738-91	METAL	
R224	1-215-730-91	METAL	
R225	1-215-714-91	METAL	
R226	1-215-714-91	METAL	
R227	1-215-714-91	METAL	
R228	1-215-714-91	METAL	
R229	1-215-714-91	METAL	
R230	1-215-176-00	METAL	
R231	1-215-738-91	METAL	
R232	1-215-786-91	METAL	
R234	1-215-738-91	METAL	
R235	1-215-754-91	METAL	
R236	1-215-784-91	METAL	
R237	1-215-810-91	METAL	
R238	1-215-762-91	METAL	
R239	1-215-778-91	METAL	
R240	1-215-794-91	METAL	
R241	1-215-794-91	METAL	
R242	1-215-734-91	METAL	
R243	1-215-786-91	METAL	
R244	1-215-786-91	METAL	
R245	1-215-738-91	METAL	
R246	1-215-738-91	METAL	
R252	1-215-762-91	METAL	
R253	1-215-762-91	METAL	
R254	1-215-774-91	METAL	
R257	1-215-738-91	METAL	
R258	1-215-738-91	METAL	
R259	1-215-762-91	METAL	
R260	1-215-782-91	METAL	
R261	1-215-750-91	METAL	
R262	1-217-393-00	FUSIBLE	

Ref.No.	Part No.	Description	Remark
R263	1-215-776-91	METAL	
R264	1-215-781-91	METAL	
R265	1-215-752-91	METAL	
R266	1-215-762-91	METAL	
R267	1-215-810-91	METAL	
R268	1-215-738-91	METAL	
R269	1-215-770-91	METAL	
R270	1-215-150-00	METAL	
R271	1-215-786-91	METAL	
R273	1-215-782-91	METAL	
R274	1-215-754-91	METAL	
R275	1-215-762-91	METAL	
R276	1-215-150-00	METAL	
R277	1-215-738-91	METAL	
R280	1-215-786-91	METAL	
R281	1-215-756-91	METAL	
R282	1-215-754-91	METAL	
R284	1-247-005-00	CARBON	
R285	1-215-754-91	METAL	
R286	1-215-756-91	METAL	
R287	1-215-786-91	METAL	
R288	1-215-788-91	METAL	
R289	1-215-778-91	METAL	
R297	1-215-738-91	METAL	
R298	1-215-738-91	METAL	
R301	1-215-742-91	METAL	
R302	1-215-742-91	METAL	
R303	1-215-723-91	METAL	
R304	1-215-744-91	METAL	
R305	1-215-738-91	METAL	
R306	1-215-738-91	METAL	
R307	1-215-738-91	METAL	
R308	1-215-726-91	METAL	
R309	1-215-744-91	METAL	
R310	1-215-760-91	METAL	
R313	1-215-722-91	METAL	
R314	1-215-738-91	METAL	
R315	1-215-748-91	METAL	
R316	1-215-748-91	METAL	
R317	1-215-772-91	METAL	
R318	1-215-720-91	METAL	
R319	1-215-738-91	METAL	
R320	1-215-788-91	METAL	
R322	1-215-762-91	METAL	
R323	1-215-744-91	METAL	
R324	1-215-732-91	METAL	
R325	1-215-728-91	METAL	
R326	1-215-784-91	METAL	
R327	1-215-738-91	METAL	
R331	1-215-784-91	METAL	
R332	1-215-732-91	METAL	
R333	1-215-760-91	METAL	
R334	1-215-747-91	METAL	

D

Ref.No.	Part No.	Description	Remark
R335	1-215-766-91	METAL	
R336	1-215-762-91	METAL	
R337	1-215-762-91	METAL	
R338	1-215-738-91	METAL	
R339	1-215-738-91	METAL	
R340	1-215-728-91	METAL	
R341	1-215-728-91	METAL	
R343	1-215-786-91	METAL	
R344	1-215-770-91	METAL	
R345	1-215-789-91	METAL	
R346	1-215-722-91	METAL	
R347	1-215-732-91	METAL	
R348	1-215-734-91	METAL	
R349	1-215-760-91	METAL	
R350	1-215-760-91	METAL	
R351	1-215-770-91	METAL	
R352	1-215-744-91	METAL	
R353	1-215-750-91	METAL	
R354	1-215-790-91	METAL	
R356	1-215-764-91	METAL	
R357	1-215-752-91	METAL	
R358	1-215-768-91	METAL	
R359	1-215-766-91	METAL	
R360	1-215-782-91	METAL	
R361	1-215-734-91	METAL	
R362	1-215-160-00	METAL	
R364	1-215-746-91	METAL	
R365	1-215-764-91	METAL	
R366	1-215-746-91	METAL	
R367	1-215-722-91	METAL	
R368	1-215-722-91	METAL	
R369	1-215-722-91	METAL	
R370	1-215-730-91	METAL	
R371	1-215-714-91	METAL	
R372	1-215-740-91	METAL	
R373	1-215-738-91	METAL	
R374	1-215-804-91	METAL	
R376	1-215-186-00	METAL	
R377	1-215-186-00	METAL	
R378	1-215-768-91	METAL	
R379	1-215-771-91	METAL	
R380	1-215-784-91	METAL	
R381	1-215-738-91	METAL	
R501	1-215-738-91	METAL	
R502	1-215-160-00	METAL	
R504	1-215-760-91	METAL	
R505	1-215-746-91	METAL	
R507	1-214-765-00	METAL	
R507A	1-215-802-91	METAL	
R508	1-215-776-91	METAL	
R509	1-215-738-91	METAL	
R510	1-215-736-91	METAL	
R511	1-215-758-91	METAL	

Ref.No.	Part No.	Description	Remark
R512	1-215-712-91	METAL	
R513	1-215-779-91	METAL	
R515	1-215-795-91	METAL	
R516	1-212-361-00	METAL OXIDE	
R517	1-215-760-91	METAL	
R518	1-215-758-91	METAL	
R519	1-215-764-91	METAL	
R520	1-215-762-91	METAL	
R521	1-212-891-00	FUSIBLE	
R522	1-244-851-51	CARBON	
R523	1-215-732-91	METAL	
R525	1-215-748-91	METAL	
R526	1-215-802-91	METAL	
R527	1-215-752-91	METAL	
R530	1-215-748-91	METAL	
R531	1-215-728-91	METAL	
R532	1-215-740-91	METAL	
R533	1-215-794-91	METAL	
R535	1-215-738-91	METAL	
R536	1-215-749-91	METAL	
R537	1-215-726-91	METAL	
R538	1-213-140-00	METAL OXIDE	
R539	1-215-776-91	METAL	
R582	1-215-786-91	METAL	
R591	1-215-746-91	METAL	
R592	1-215-148-00	METAL	
R596	1-215-800-91	METAL	
R597	1-215-740-91	METAL	
R598	1-215-758-91	METAL	
R604	1-205-737-00	CEMENTED	
R605	1-205-728-00	CEMENTED	
R606	1-215-698-91	METAL	
R608	1-206-660-00	METAL OXIDE	
R609	1-215-730-91	METAL	
R610	1-215-770-91	METAL	
R612	1-215-099-81	METAL	
R613	1-215-802-91	METAL	
R616	1-215-140-00	METAL	
R618	1-247-855-00	CARBON	
R651	1-212-936-00	FUSIBLE	
R652	1-217-653-00	FUSIBLE	
R653	1-217-653-00	FUSIBLE	
R654	1-217-418-00	FUSIBLE	
R655	1-214-777-00	METAL	
R656	1-215-746-91	METAL	
R657	1-215-770-91	METAL	
R658	1-215-734-91	METAL	
R659	1-215-754-91	METAL	
R660	1-215-733-91	METAL	
R661	1-215-750-91	METAL	
R662	1-215-786-91	METAL	
R663	1-215-802-91	METAL	
R664	1-215-776-91	METAL	

D

S2

S

H2

J2

J1

H1

N

Ref.No.	Part No.	Description	Remark
R665	1-215-772-91	METAL 27K 5% 1/6W	
R666	1-215-762-91	METAL 10K 5% 1/6W	
R667	1-215-766-91	METAL 15K 5% 1/6W	
R669	1-215-204-00	METAL 150K 5% 1/4W	
R670	1-215-762-91	METAL 10K 5% 1/6W	
R671	1-215-750-91	METAL 3.3K 5% 1/6W	
R672	1-247-837-00	CARBON 1.8K 5% 1/8W F	
R674	1-213-149-00	METAL OXIDE 3.3 5% 1W F	
R675	1-214-749-00	METAL 6.8K 1% 1/4W	
R676	1-214-753-00	METAL 10K 1% 1/4W	
R801	1-215-714-91	METAL 100 5% 1/6W	
R802	1-247-236-00	CARBON 680 5% 1/2W	
R803	1-215-710-91	METAL 68 5% 1/6W	
R804	1-213-147-00	METAL OXIDE 2.2K 5% 1W F	
R805	1-213-146-00	METAL OXIDE 1.8K 5% 1W F	
R806	1-202-838-00	SOLID 100K 1/2W	
R807	1-202-818-00	SOLID 1K 1/2W	
R808	1-202-826-00	SOLID 4.7K 1/2W	
R809	1-244-924-00	CARBON 130K 5% 1/2W	
R810	1-210-859-00	CARBON 1.2 5% 1/8W F	
R811	1-217-418-00	FUSIBLE 0.47 10% 1/2W F	
R812	1-215-770-91	METAL 22K 5% 1/6W	
R815	1-206-658-00	METAL OXIDE 560 5% 2W F	
R817	1-206-459-00	METAL OXIDE 6.8 5% 2W F	
R818	1-247-791-00	CARBON 22 5% 1/8W F	
R820	1-217-220-00	WIREWOUND 47 10% 2W F	
R821	1-210-825-00	SOLID 3.3M 5% 1/4W	
R824	1-207-616-00	WIREWOUND 0.47 10% 2W F	
R825	1-213-144-00	METAL OXIDE 1.2K 5% 1W F	
R826	1-215-762-91	METAL 10K 5% 1/6W	
R827	1-217-399-00	FUSIBLE 100 5% 1/4W F	
VARIABLE RESISTOR			
RV251	1-228-727-00	RES, ADJ, CERAMIC CARBON 47K	
RV301	1-228-720-00	RES, ADJ, CERAMIC CARBON 1K	
RV302	1-228-724-00	RES, ADJ, CERAMIC CARBON 10K	
RV303	1-228-725-00	RES, ADJ, CERAMIC CARBON 22K	
RV501	1-228-723-00	RES, ADJ, CERAMIC CARBON 4.7K	
RV502	1-228-728-00	RES, ADJ, CERAMIC CARBON 100K	
RV651	1-228-720-00	RES, ADJ, CERAMIC CARBON 1K	
SPARK GAP			
SG801	1-519-063-XX	DISCHARGING GAP	
TRANSFORMER			
T301	1-404-524-21	DAT	
T602	1-421-412-11	COIL, FERRITE	
T604	1-437-147-11	TRANSFORMER, FERRITE	
T605	1-437-079-00	TRANSFORMER, HORIZONTAL DRIVE	
T606	1-421-652-11	TRANSFORMER, FERRITE (SRT)	
T607	1-421-624-12	TRANSFORMER, CURRENT	

Ref.No.	Part No.	Description	Remark
T801	1-437-149-11	TRANSFORMER, HORIZONTAL DRIVE	
T802	1-439-332-21	TRANSFORMER ASSY, FLYBACK	
T891	1-421-634-00	TRANSFORMER, FERRITE (V.PCT)	
CRYSTAL			
X301	1-567-131-00	OSCILLATOR, CRYSTAL	

*1-610-433-00	S2 BOARD	*****	
DIODE			
D481	8-719-961-03	DIODE RGP10G	
RELAY			
RL901	1-515-511-11	RELAY, HIGH FREQUENCY	

*1-611-172-00	S BOARD	*****	
CAPACITOR			
C01	1-123-332-00	ELECT 47MF 20% 16V	
TRANSISTOR			
Q01	8-729-245-83	TRANSISTOR 2SC2458	
Q02	8-729-204-83	TRANSISTOR 2SA1048GR	
RESISTOR			
R01	1-215-766-91	METAL 15K 5% 1/6W	
R02	1-215-762-91	METAL 10K 5% 1/6W	
R03	1-215-754-91	METAL 4.7K 5% 1/6W	

*1-611-187-21	H2 BOARD	*****	
*4-362-295-00	HOLDER (C), LED		
*4-366-807-00	COVER (C), LED HOLDER		
DIODE			
LED404	8-719-901-96	DIODE SLP1618	
LED405	8-719-901-96	DIODE SLP1618	
LED406	8-719-901-96	DIODE SLP1618	

Ref.No.	Part No.	Description	Remark
*1-611-171-00	J2 BOARD	*****	
CONNECTOR			
J2	*1-508-766-00	4P PLUG (M)	

*1-611-170-00	J1 BOARD	*****	
JACK			
CN901	1-507-657-00	JACK	
RESISTOR			
R901	1-215-144-00	METAL 470 5% 1/4W	
R902	1-215-144-00	METAL 470 5% 1/4W	

*1-611-002-00	H1 BOARD	*****	
*1-526-634-00	SOCKET, IC (8P)		
*4-357-812-00	HOLDER, LED		
*4-362-207-00	HOLDER (P), LED		
*4-362-219-00	COVER (W), LED HOLDER		
CAPACITOR			
C401	1-123-356-00	ELECT 10MF 20% 16V	
C402	1-123-356-00	ELECT 10MF 20% 16V	
DIODE			
D401	8-719-911-19	DIODE 1SS119	
D402	8-719-911-19	DIODE 1SS119	
D403	8-719-911-19	DIODE 1SS119	
D404	8-719-911-19	DIODE 1SS119	
D405	8-719-911-19	DIODE 1SS119	
D406	8-719-911-19	DIODE 1SS119	
D407	8-719-911-19	DIODE 1SS119	
D408	8-719-911-19	DIODE 1SS119	
D409	8-719-911-19	DIODE 1SS119	
LED401	8-719-912-22	DIODE SL1222	
LED402	8-719-800-24	DIODE TLR147	
LED403	8-719-901-96	DIODE SLP1618	
RESISTOR			
R402	1-215-160-00	METAL 2.2K 5% 1/4W	
R412	1-215-134-00	METAL 180 5% 1/4W	
VARIABLE RESISTOR			
RV401	1-228-578-00	RES, VAR, CARBON 10K	
RV402	1-228-578-00	RES, VAR, CARBON 10K	
RV403	1-228-578-00	RES, VAR, CARBON 10K	

Ref.No.	Part No.	Description	Remark
RV404	1-228-578-00	RES, VAR, CARBON 10K	
RV405	1-228-578-00	RES, VAR, CARBON 10K	
SWITCH			
SW401	1-554-118-00	SWITCH, PUSH	
SW402	1-554-118-00	SWITCH, PUSH	
SW403	1-552-774-00	SWITCH, PUSH	
SW404	1-552-774-00	SWITCH, PUSH	
SW405	1-552-774-00	SWITCH, PUSH	
SW406	1-552-774-00	SWITCH, PUSH	
SW407	1-552-774-00	SWITCH, PUSH	
SW408	1-552-774-00	SWITCH, PUSH	
SW409	1-552-774-00	SWITCH, PUSH	
SW410	1-552-774-00	SWITCH, PUSH	
SW411	1-552-774-00	SWITCH, PUSH	
SW412	1-552-774-00	SWITCH, PUSH	
SW413	1-552-774-00	SWITCH, PUSH	
SW414	1-552-774-00	SWITCH, PUSH	
SW415	1-552-774-00	SWITCH, PUSH	
SW416	1-552-774-00	SWITCH, PUSH	
SW417	1-552-774-00	SWITCH, PUSH	
SW418	1-552-774-00	SWITCH, PUSH	
SW419	1-552-774-00	SWITCH, PUSH	

*1-606-794-00	N BOARD	*****	
*4-342-117-00	CASE, SHIELD (MAIN), R		
*4-342-118-00	LID, SHIELD CASE, R		
CAPACITOR			
C1	1-123-617-00	ELECT 10MF 20% 16V	
C2	1-123-617-00	ELECT 10MF 20% 16V	
C3	1-123-617-00	ELECT 10MF 20% 16V	
C4	1-161-057-00	CERAMIC 0.033MF 10% 25V	
C5	1-106-184-00	MYLAR 0.0033MF 5% 50V	
C6	1-123-821-00	ELECT 47MF 20% 16V	
DIODE			
D1	8-719-110-32	DIODE PH302B	
IC			
IC1	8-759-113-73	IC UPC1373H	
COIL			
L1	1-404-310-00	COIL	

A

A

Ref.No.	Part No.	Description	Remark
MISCELLANEOUS			

	1-161-834-00	CAP (SMALL FEED-THROUGH)1000PF	
	Δ 1-451-226-11	DEFLECTION YOKE (SY105A)	
	1-452-032-00	MAGNET, DISK; 10MM Ø	
	1-452-094-00	MAGNET, ROTATABLE DISK; 15MM Ø	
	1-452-146-21	MAGNET, BMC	
	Δ 1-452-315-11	CRT NECK ASSY (NA303)	
	*1-507-900-00	JACK	
	Δ 1-536-849-11	TERMINAL BOARD ASSY, ANTENNA	
	Δ 1-551-270-31	CORD, POWER	
	Δ 1-557-117-12	SOCKET, PAL ANTENNA (WITH CABLE)	
	*1-557-261-11	CABLE, P-P	
L901	Δ 1-426-041-21	COIL, DEGAUSSING	
L902	Δ 1-426-041-21	COIL, DEGAUSSING	
RV902	Δ 1-215-066-21	RES ASSY, HIGH-VOLTAGE	
RV901	Δ 1-228-544-11	RESISTOR ASSY, HIGH-VOLTAGE	
S801	Δ 1-552-806-21	SWITCH, PUSH	
S901	Δ 1-553-225-12	SWITCH, PUSH	
SP901	1-503-270-00	SPEAKER	
V901	Δ 8-738-405-05	CRT (6800B22)	

ACCESSORIES AND PACKING MATERIALS

Part No.	Description	Remark
A-1470-625-A	COMMANDER ASSY (RM-635)	
X-4369-107-0	BAND ASSY	
4-361-988-02	BAG, PROTECTION	
4-369-125-00	CUSHION (UPPER) (ASSY)	
4-369-126-00	CUSHION (LOWER) (ASSY)	
4-369-129-00	TRAY	
4-369-157-01	INDIVIDUAL CARTON	
4-491-710-51	INSTRUCTION, TELETEXT	
4-491-792-01	SCHEMATIC DIAGRAM (B2)	
4-493-828-71	MANUAL, INSTRUCTION	

Δ A-1295-810-A A BOARD, SUB, COMPLETE (KV2752ET only)

Δ 1-463-411-00	TUNER, UHF/VHF ET (UV411)
Δ 4-363-672-00	CASE (MAIN), SHIELD, VIF
Δ 4-363-673-00	CASE (BOTTOM LID), SHIELD, VIF
Δ 4-363-674-00	CASE (UPPER LID), SHIELD, VIF

Ref.No.	Part No.	Description	Remark
CONNECTOR			
A1	Δ 1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P	
A2	Δ 1-560-126-00	PLUG, CONNECTOR (2.5MM) 6P	
A3	Δ 1-560-156-00	PLUG, CONNECTOR (2.5MM PITCH)	
CAPACITOR			
C102	1-123-356-00	ELECT 10MF 20% 16V	
C103	1-123-356-00	ELECT 10MF 20% 16V	
C105	1-123-356-00	ELECT 10MF 20% 16V	
C106	1-123-318-00	ELECT 33MF 20% 16V	
C107	1-123-356-00	ELECT 10MF 20% 16V	
C108	1-108-387-00	MYLAR 0.068MF 10% 100V	
C109	1-108-387-00	MYLAR 0.068MF 10% 100V	
C110	1-102-963-00	CERAMIC 33PF 5% 50V	
C111	1-123-318-00	ELECT 33MF 20% 16V	
C112	1-102-525-00	CERAMIC 68PF 5% 50V	
C113	1-102-514-00	CERAMIC 22PF 5% 50V	
C115	1-102-523-00	CERAMIC 56PF 5% 50V	
C116	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C117	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C118	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C119	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C120	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C121	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C123	1-102-108-00	CERAMIC 150PF 10% 50V	
C124	1-130-014-00	FILM 470PF 5% 50V	
C126	1-123-318-00	ELECT 33MF 20% 16V	
C127	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C128	1-101-004-00	CERAMIC 0.01MF 50V	
C129	1-101-004-00	CERAMIC 0.01MF 50V	
C130	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C131	1-123-353-00	ELECT 2.2MF 20% 50V	
C132	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C133	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C134	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C135	1-102-525-00	CERAMIC 68PF 5% 50V	
C136	1-102-525-00	CERAMIC 68PF 5% 50V	
C137	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C138	1-123-286-00	ELECT 0.33MF 20% 50V	
C139	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C140	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
C141	1-123-318-00	ELECT 33MF 20% 16V	
C142	1-102-525-00	CERAMIC 68PF 5% 50V	
C143	1-101-004-00	CERAMIC 0.01MF 50V	
C144	1-123-286-00	ELECT 0.33MF 20% 50V	
C151	1-101-004-00	CERAMIC 0.01MF 50V	
C152	1-101-004-00	CERAMIC 0.01MF 50V	
C153	1-123-356-00	ELECT 10MF 20% 16V	
C154	1-101-004-00	CERAMIC 0.01MF 50V	
C155	1-123-332-00	ELECT 47MF 20% 16V	
C156	1-123-306-00	ELECT 47MF 20% 10V	
C157	1-123-306-00	ELECT 47MF 20% 10V	
C158	1-123-379-00	ELECT 0.47MF 20% 50V	
C159	1-102-816-00	CERAMIC 120PF 5% 50V	

Ref.No.	Part No.	Description	Remark
C162	1-108-570-00	MYLAR 0.0043MF 5% 50V	
C163	1-130-626-00	FILM 0.033MF 5% 50V	
C164	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C165	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C167	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C168	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C169	1-123-356-00	ELECT 10MF 20% 16V	
C170	1-123-356-00	ELECT 10MF 20% 16V	
C171	1-123-318-00	ELECT 33MF 20% 16V	
C172	1-123-379-00	ELECT 0.47MF 20% 50V	
C173	1-123-379-00	ELECT 0.47MF 20% 50V	
C174	1-106-367-00	MYLAR 0.01MF 10% 400V	
C175	1-106-367-00	MYLAR 0.01MF 10% 400V	
C176	1-123-380-00	ELECT 1MF 20% 50V	
C177	1-123-380-00	ELECT 1MF 20% 50V	
C179	1-123-328-00	ELECT 4.7MF 20% 25V	
C180	1-108-371-00	MYLAR 0.0033MF 10% 100V	
C181	1-123-318-00	ELECT 33MF 20% 16V	
C182	1-123-307-00	ELECT 100MF 20% 10V	
C183	1-102-108-00	CERAMIC 150PF 10% 50V	
C184	1-102-973-00	CERAMIC 100PF 5% 50V	
C185	1-123-356-00	ELECT 10MF 20% 16V	
C186	1-102-121-00	CERAMIC 0.0022MF 10% 50V	
C187	1-102-529-00	CERAMIC 100PF 5% 50V	
C188	1-102-125-00	CERAMIC 0.0047MF 10% 50V	
DISCRIMINATOR			
CD151	1-404-501-00	DISCRIMINATOR, CERAMIC	
FILTER			
CF101	1-527-840-00	FILTER, CERAMIC	
CF102	1-404-134-00	TRAP, CERAMIC (5.5MHZ)	
CF151	1-527-839-00	FILTER, CERAMIC	
DIODE			
D102	8-719-911-19	DIODE 1SS119	
D103	8-719-102-74	DIODE RM6.2E-N2	
D151	8-719-911-19	DIODE 1SS119	
D152	8-719-911-19	DIODE 1SS119	
D153	8-719-911-19	DIODE 1SS119	
D154	8-719-911-19	DIODE 1SS119	
D170	8-719-911-19	DIODE 1SS119	
D171	8-719-911-19	DIODE 1SS119	
IC			
IC101	8-759-909-08	IC TDA3541	
IC102	8-759-909-54	IC TDA2546A	
IC103	8-759-800-12	IC LA7920	
IC151	8-759-007-54	IC TDA4940	
IC152	8-759-007-55	IC TDA4944	
COIL			
L102	1-404-476-00	COIL, IF	

Ref.No.	Part No.	Description	Remark
L103	1-408-593-00	MICRO INDUCTOR 1.5UH	
L104	1-408-600-00	MICRO INDUCTOR 5.6UH	
L105	1-404-477-00	COIL, IF	
L106	1-404-493-00	COIL	
L107	1-404-493-00	COIL	
L109	1-408-603-00	MICRO INDUCTOR 10UH	
L110	1-408-600-00	MICRO INDUCTOR 5.6UH	
L111	1-404-493-00	COIL	
L113	1-408-226-00	MICRO INDUCTOR 82UH	
L152	1-404-506-00	COIL, VARIABLE	
L170	1-408-247-00	MICRO INDUCTOR 33MH	
L171	1-408-602-00	MICRO INDUCTOR 8.2UH	
TRANSISTOR			
Q101	8-729-245-83	TRANSISTOR 2SC2458	
Q102	8-765-300-00	TRANSISTOR 2SC2009	
Q103	8-729-204-83	TRANSISTOR 2SA1048-GR	
Q104	8-729-900-36	TRANSISTOR DTC124ES	
Q151	8-729-245-83	TRANSISTOR 2SC2458	
Q152	8-729-245-83	TRANSISTOR 2SC2458	
Q153	8-729-245-83	TRANSISTOR 2SC2458	
Q154	8-729-900-89	TRANSISTOR DTC144ES	
Q155	8-729-245-83	TRANSISTOR 2SC2458	
Q156	8-729-245-83	TRANSISTOR 2SC2458	
Q157	8-729-900-89	TRANSISTOR DTC144ES	
Q158	8-729-900-89	TRANSISTOR DTC144ES	
Q172	8-729-204-83	TRANSISTOR 2SA1048-GR	
Q173	8-729-245-83	TRANSISTOR 2SC2458	
Q174	8-729-245-83	TRANSISTOR 2SC2458	
Q175	8-729-245-83	TRANSISTOR 2SC2458	
Q176	8-729-900-89	TRANSISTOR DTC144ES	
RESISTOR			
R101	1-247-831-00	METAL 1K 5% 1/6W	
R102	1-247-831-00	METAL 1K 5% 1/6W	
R105	1-247-855-00	METAL 10K 5% 1/6W	
R106	1-247-843-00	METAL 3.3K 5% 1/6W	
R107	1-247-843-00	METAL 3.3K 5% 1/6W	
R108	1-247-891-00	METAL 330K 5% 1/6W	
R109	1-247-839-00	METAL 2.2K 5% 1/6W	
R110	1-247-839-00	METAL 2.2K 5% 1/6W	
R111	1-247-847-00	METAL 4.7K 5% 1/6W	
R112	1-247-827-00	METAL 680 5% 1/6W	
R113	1-247-845-00	METAL 3.9K 5% 1/6W	
R114	1-247-815-00	METAL 220 5% 1/6W	
R115	1-247-835-00	METAL 1.5K 5% 1/6W	
R116	1-247-823-00	METAL 470 5% 1/6W	
R118	1-247-815-00	METAL 220 5% 1/6W	
R119	1-247-823-00	METAL 470 5% 1/6W	
R120	1-247-871-00	METAL 47K 5% 1/6W	
R122	1-247-855-00	METAL 10K 5% 1/6W	
R125	1-247-829-00	METAL 820 5% 1/6W	
R126	1-247-829-00	METAL 820 5% 1/6W	

A

<u>Ref.No</u>	<u>Part No.</u>	<u>Description</u>	<u>Remark</u>		
R127	1-247-829-00	METAL	820	5%	1/6W
R131	1-247-871-00	METAL	47K	5%	1/6W
R132	1-247-855-00	METAL	10K	5%	1/6W
R134	1-247-875-00	METAL	68K	5%	1/6W
R135	1-247-873-00	METAL	56K	5%	1/6W
R136	1-247-863-00	METAL	22K	5%	1/6W
R137	1-247-863-00	METAL	22K	5%	1/6W
R138	1-247-823-00	METAL	470	5%	1/6W
R139	1-247-783-00	METAL	10	5%	1/6W
R151	1-247-831-00	METAL	1K	5%	1/6W
R152	1-247-869-00	METAL	39K	5%	1/6W
R153	1-247-821-00	METAL	390	5%	1/6W
R155	1-247-863-00	METAL	22K	5%	1/6W
R156	1-247-877-00	METAL	82K	5%	1/6W
R157	1-247-833-00	METAL	1.2K	5%	1/6W
R158	1-247-833-00	METAL	1.2K	5%	1/6W
R159	1-247-847-00	METAL	4.7K	5%	1/6W
R160	1-247-847-00	METAL	4.7K	5%	1/6W
R161	1-247-847-00	METAL	4.7K	5%	1/6W
R162	1-247-847-00	METAL	4.7K	5%	1/6W
R166	1-247-843-00	METAL	3.3K	5%	1/6W
R167	1-247-867-00	METAL	33K	5%	1/6W
R168	1-247-863-00	METAL	22K	5%	1/6W
R172	1-247-813-00	METAL	180	5%	1/6W
R173	1-247-871-00	METAL	47K	5%	1/6W
R174	1-247-889-00	METAL	270K	5%	1/6W
R175	1-247-865-00	METAL	27K	5%	1/6W
R176	1-247-831-00	METAL	1K	5%	1/6W
R177	1-247-855-00	METAL	10K	5%	1/6W
R178	1-247-855-00	METAL	10K	5%	1/6W
R179	1-247-855-00	METAL	10K	5%	1/6W
R180	1-247-831-00	METAL	1K	5%	1/6W
R181	1-247-833-00	METAL	1.2K	5%	1/6W
R182	1-247-839-00	METAL	2.2K	5%	1/6W
R183	1-247-831-00	METAL	1K	5%	1/6W
R184	1-247-817-00	METAL	270	5%	1/6W
R185	1-247-819-00	METAL	330	5%	1/6W
R186	1-247-861-00	METAL	18K	5%	1/6W
R193	1-247-807-00	METAL	100	5%	1/6W

VARIABLE RESISTOR

RV101	1-228-727-00	RES, ADJ, CERAMIC CARBON 47K
RV151	1-228-726-00	RES, ADJ, CERAMIC CARBON 33K

FILTER

SWF101	1-404-438-00	FILTER, SAW
--------	--------------	-------------